



Ardeo Lights, LTD
info@ardeolights.eu
www.ardeolights.eu





CLASS I
Do not be covered by other heat insulation materials.

CLASS II
The safety of the luminaire is guaranteed by the double reinforced insulation of conductive parts, with no earth wire.

CLASS III
The luminaire is fitted with a protection device against electrical shock that features a very low voltage power supply and prevents it from generating higher voltages.
Note: a Class III luminaire does not have to be equipped with an earth protection.

TYPE OF INSTALLATION
Luminaire suitable for installation on normally inflammable surfaces.

Luminaire suitable for installation exclusively on fireproof surfaces

IP RATING
Electrical fittings are preset in order to prevent the intrusion and contact with solids and liquids with live parts. Resistance against the penetration of solids and liquids is expressed by the initials IP, followed by two digits that stand for the degree of protection:the first referring to solids, the second to liquids.

FIRST DIGITAL

NUMBER	PROTECTION
0	No protection
1	Protected against solid bodies over 50mm in diameter
2	Protected against solid bodies over 12mm in diameter
3	Protected against solid bodies over 2.5mm in diameter
4	Protected against solid bodies over 1.0mm in diameter
5	Protected against dust
6	Fully protected against dust

SECOND DIGITAL

NUMBER	PROTECTION
0	No protection
1	Protected against drops of water falling vertically
2	Protected against drops of water a max, inclination of 15 degree
3	Protected against drops of water a max, inclination of 60 degree
4	Protected against jets of water
5	Protected against waves
6	Protected against immersion
7	Protected against long term immersion

Luminaire suitable for installation on normally inflammable surfaces, into ceilings covered with an insulator.

APPROVALS
The Restriction of the use of certain hazardous substances in electrical and electronic equipment.

Correct disposal of this product
(waste electrical & electronical equipment)

Indoor lamps and lanterns.

All products subject to the EMC guideline 89/336(elec-tromagnetic compatibility)and the guideline 73/23(lo-w-voltage) meet the requirements therein and bear the CE symbol on their packaging.

IP20 All luminaires meet the requirements of protection mo-de IP20 and are not marked. Other protection modes are specified for each product.



LUMEN RECOMMENDATION

Nominal(lm)	Application
20-30-50	Outdoor activities and public places, such as corridor, storage room, stair, bathroom, coffee shop, station advertising, etc
30-110-150	Circulation places, such as dining room, bedroom, elevators, duty room, games room, station hall, etc
100-150-200	The uncontinuous use of the workplace, the general office, reception room, store shelves, counters,kitchen, etc
200-300-500	Simple visual requirements, such as reading room, playroom, showcase, showroom, general sports venues, etc
300-500-700	Medium visual requirements, such as competition venues, factories, offices, etc
500-750-1000	High visual requirements, such as metal processing plants, and small assembly workshop, electrical workshop, polishing workshop, etc
750-1000-1500	Higher visual requirement
1000-1500-2000	Special visual operation requirements
2000	Very precise visual operations

COLOR RENDERING INDEX

CRI is the abilityof a lightsource to reproducethe colors of various objectsfaithfullyin comparisonwithan ideal or naturallightsource.

Ra>90 High CRI	Ra>80 Moderate CRI	Ra>70 Standard CRI
-------------------	-----------------------	-----------------------





Color Temperature



2700K



3000K



3500K



4000K




5000K



6000K

Beam Angle

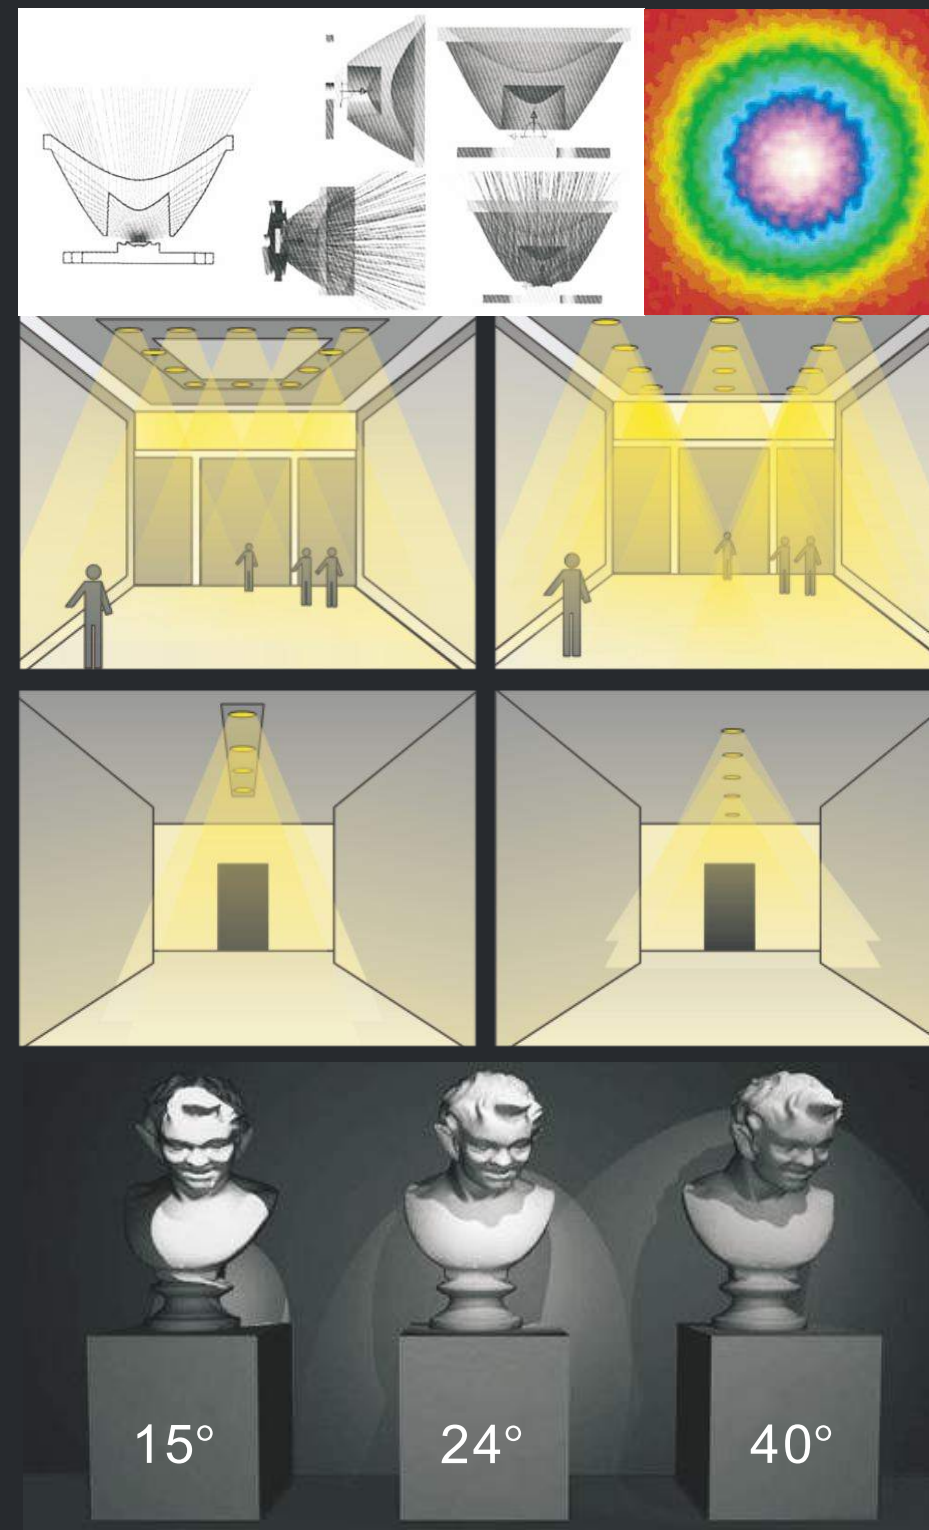



CONTENTS

MULTI-COMBINATION SERIES ONE OPENING TOOLING



P13
Z010101-8 8W
Z010102-15 15W
Z010103-25 25W



P14
Z010201-8 8W
Z010202-15 15W
Z010203-25 25W



P15-16
Z030101-8 8W
Z030102-15 15W
Z030103-25 25W



P17
Z030201-8 8W
Z030202-15 15W
Z030203-25 25W



P18
Z020101-8 8W
Z020102-15 15W
Z020103-25 25W



P/19-20
Z110101-6 6W
Z110102-12 12W
Z110103-20 20W
Z110104-30 30W



P/19-20
Z110105-6 6W
Z110106-12 12W
Z110107-20 20W
Z110108-30 30W



P/21-22
Z110201-6×2 6×2W
Z110202-12×2 12×2W
Z110203-20×2 20×2W
Z110204-30×2 30×2W



P/21-22
Z110205-6×2 6×2W
Z110206-12×2 12×2W
Z110207-20×2 20×2W
Z110208-30×2 30×2W



P/23-24
Z110301-6×3 6×3W



P/23-24
Z110302-6×3 6×3W



P/23-24
Z110401-6×4 6×4W



P/23-24
Z110402-6×4 6×4W



P/27-28
Z110501-6 6W
Z110502-12 12W
Z110503-20 20W
Z110504-30 30W



P/27-28
Z110601-12 12W



P/29-30
Z110602-12 12W



P/29-30
Z110701-12×2 12×2W



P/29-30
Z110702-12×2 12×2W

MULTI-COMBINATION SERIES TWO



LED TRACK LIGHT SERIES



Z010301-20	20W
Z010302-30	30W
Z010303-40	40W
Z010304-50	50W



Z010401-20	20W
Z010402-30	30W
Z010403-40	40W
Z010404-50	50W

Saves up to 90% energy
Excellent thermal design and thermal
management materials



Z010501-15A	15W
Z010501-15B	15W
Z010501-15C	15W
Z010501-15D	15W
Z010502-25A	25W
Z010502-25B	25W
Z010502-25C	25W
Z010502-25D	25W



Z010601-20	20W
Z010602-30	30W



Z010701-12	12W
Z010702-24	24W
Z010703-34	34W



Z010801-15	15W
Z010802-30	30W
Z010803-36	36W



Z010901-20	20W
------------	-----

LED SPOT LIGHT SERIES



Z020201-5	5W
Z020202-8	8W
Z020203-8	8W
Z020204-12	12W
Z020205-25	25W
Z020206-30	30W
Z020207-35	35W
Z020208-40	40W
Z020209-45	45W
Z020210-55	55W
Z020211-40	40W
Z020212-55	55W
Z020213-70	70W



Z020301-5	5W
Z020302-8	8W
Z020303-10	10W
Z020304-25	25W
Z020305-25	25W
Z020306-40	40W



Z020401-8	8W
Z020402-15	15W
Z020403-30	30W
Z020404-40	40W



Z020501-3	3W
-----------	----



Z020601-12	12W
Z020602-25	25W
Z020603-35	35W

LED SQUARE SPOT LIGHT SERIES



Z020604-12	15W
Z020605-25	25W



Z020606-12×2	24W
Z020607-25×2	50W



Z020608-12×3	36W
Z020609-25×3	75W



Z020701-9	9W
Z020702-15	15W
Z020703-25	25W
Z020704-35	35W



Z020705-18	2×9W
Z020706-30	2×15W
Z020707-50	2×25W
Z020708-70	2×35W



Z020709-27	3×9W
Z020710-45	3×15W
Z020711-75	3×25W
Z020712-105	3×35W



Z020713-36	4×9W
Z020714-60	4×15W
Z020715-100	4×25W
Z020716-140	4×35W



LED DOWN LIGHT SERIES



Z030301-9	9W
Z030302-12	12W
Z030303-18	18W
Z030304-30	30W
Z030305-45	45W



Z030401-10	10W
Z030402-15	15W
Z030403-20	20W
Z030404-30	30W
Z030405-40	40W
Z030406-50	50W



Z030501-8	8W
Z030502-12	12W
Z030503-15	15W
Z030504-20	20W
Z030505-30	30W
Z030506-40	40W
Z030507-40	40W
Z030508-50	50W



Z030601-8	6W
Z030602-12	12W
Z030603-15	15W
Z030604-20	20W
Z030605-25	25W
Z030606-40	40W
Z030607-50	50W



Z031401-3	3W
Z031402-6	6W
Z031403-10	10W
Z031404-15	15W
Z031405-20	20W
Z031406-30	30W



Z031501-6	6W
Z031502-10	10W
Z031503-15	15W
Z031504-20	20W



Z030701-12A	12W
Z030702-20A	20W
Z030703-30A	30W
Z030701-12B	12W
Z030702-20B	20W
Z030703-30B	30W
Z030701-12C	12W
Z030702-20C	20W
Z030703-30C	30W



Z030801-9	9W
Z030802-15	15W
Z030803-20	20W
Z030804-30	30W



Z030901-10	10W
Z030902-15	15W
Z030903-25	25W
Z030904-40	40W
Z030905-55	55W



Z031001-10	10W
Z031002-15	15W
Z031003-25	25W
Z031004-40	40W
Z031005-55	55W



Z031601A	
Z031601B	
Z031602A	
Z031602B	



Z031603A	
Z031603B	
Z031603C	
Z031603D	



Z031604A	
Z031604B	
Z031604C	
Z031604D	



Z031605A	
Z031605B	
Z031605C	
Z031605D	



Z031101-10	10W
Z031102-20	15W
Z031103-30	25W
Z031104-40	40W



Z031201-10	10W
------------	-----



Z031301-5	5W
Z031302-7	7W
Z031303-12	12W
Z031304-20	20W

LED DOWN LIGHT SERIES

Saves up to 90% energy
Excellent thermal design and thermal
management materials



LED SURFACE MOUNTED DOWNLIGHT SERIES



P/103-104

Z031901-15	15W
Z031902-20	20W
Z031903-30	30W
Z031904-40	40W



P/105-106

Z032001-10	10W
Z032002-20	20W
Z032003-30	30W



P/107-108

Z032101-12A	12W
Z032102-25	25W
Z032103-30	30W

Saves up to 90% energy
Excellent thermal design and thermal
management materials



P/111-112

Z032101-4	4W
Z032102-12	12W
Z032103-20	20W
Z032104-40	40W



P/113-114

Z032105-15	15W
Z032106-36	36W



P/115-116

Z032107-15	15W
Z032108-40	40W

Saves up to 90% energy
Excellent thermal design and thermal
management materials


LED PANEL LIGHT SERIES



P/119-120

Z040101-40	40W
Z040102-40	40W

LED LINEAR LIGHT SERIES



P123

Z050101-40	40W
Z050102-60	60W




P124

Z050201-40	40W
Z050202-60	60W



LED STEP LIGHT SERIES

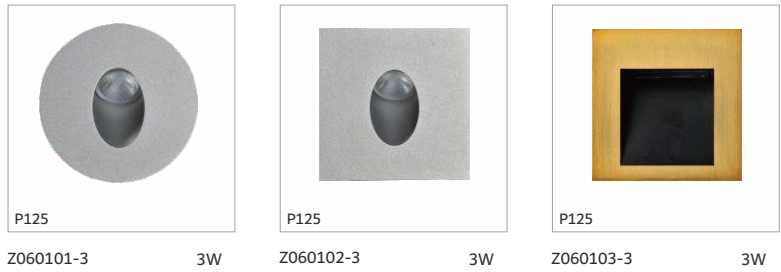

LED WATERPROOF LIGHT SERIES



Z070101-18	18W
Z070102-36	36W
Z070103-58	58W
Z070104-2×18	2×18W
Z070105-2×36	2×36W
Z070106-2×58	2×58W

Saves up to 90% energy
Excellent thermal design and thermal
management materials

LED TUBE SERIES



Z080101-4	4W
Z080102-8	8W
Z080103-13	13W
Z080104-16	16W

LED STRIP LIGHT SERIES



Z090101-24	24W
Z090102-48	48W
Z090103-36	36W
Z090104-72	72W

Saves up to 90% energy
Excellent thermal design and thermal
management materials




New Series

Five Models

Various functional luminaires with one heat sink




Three Sizes

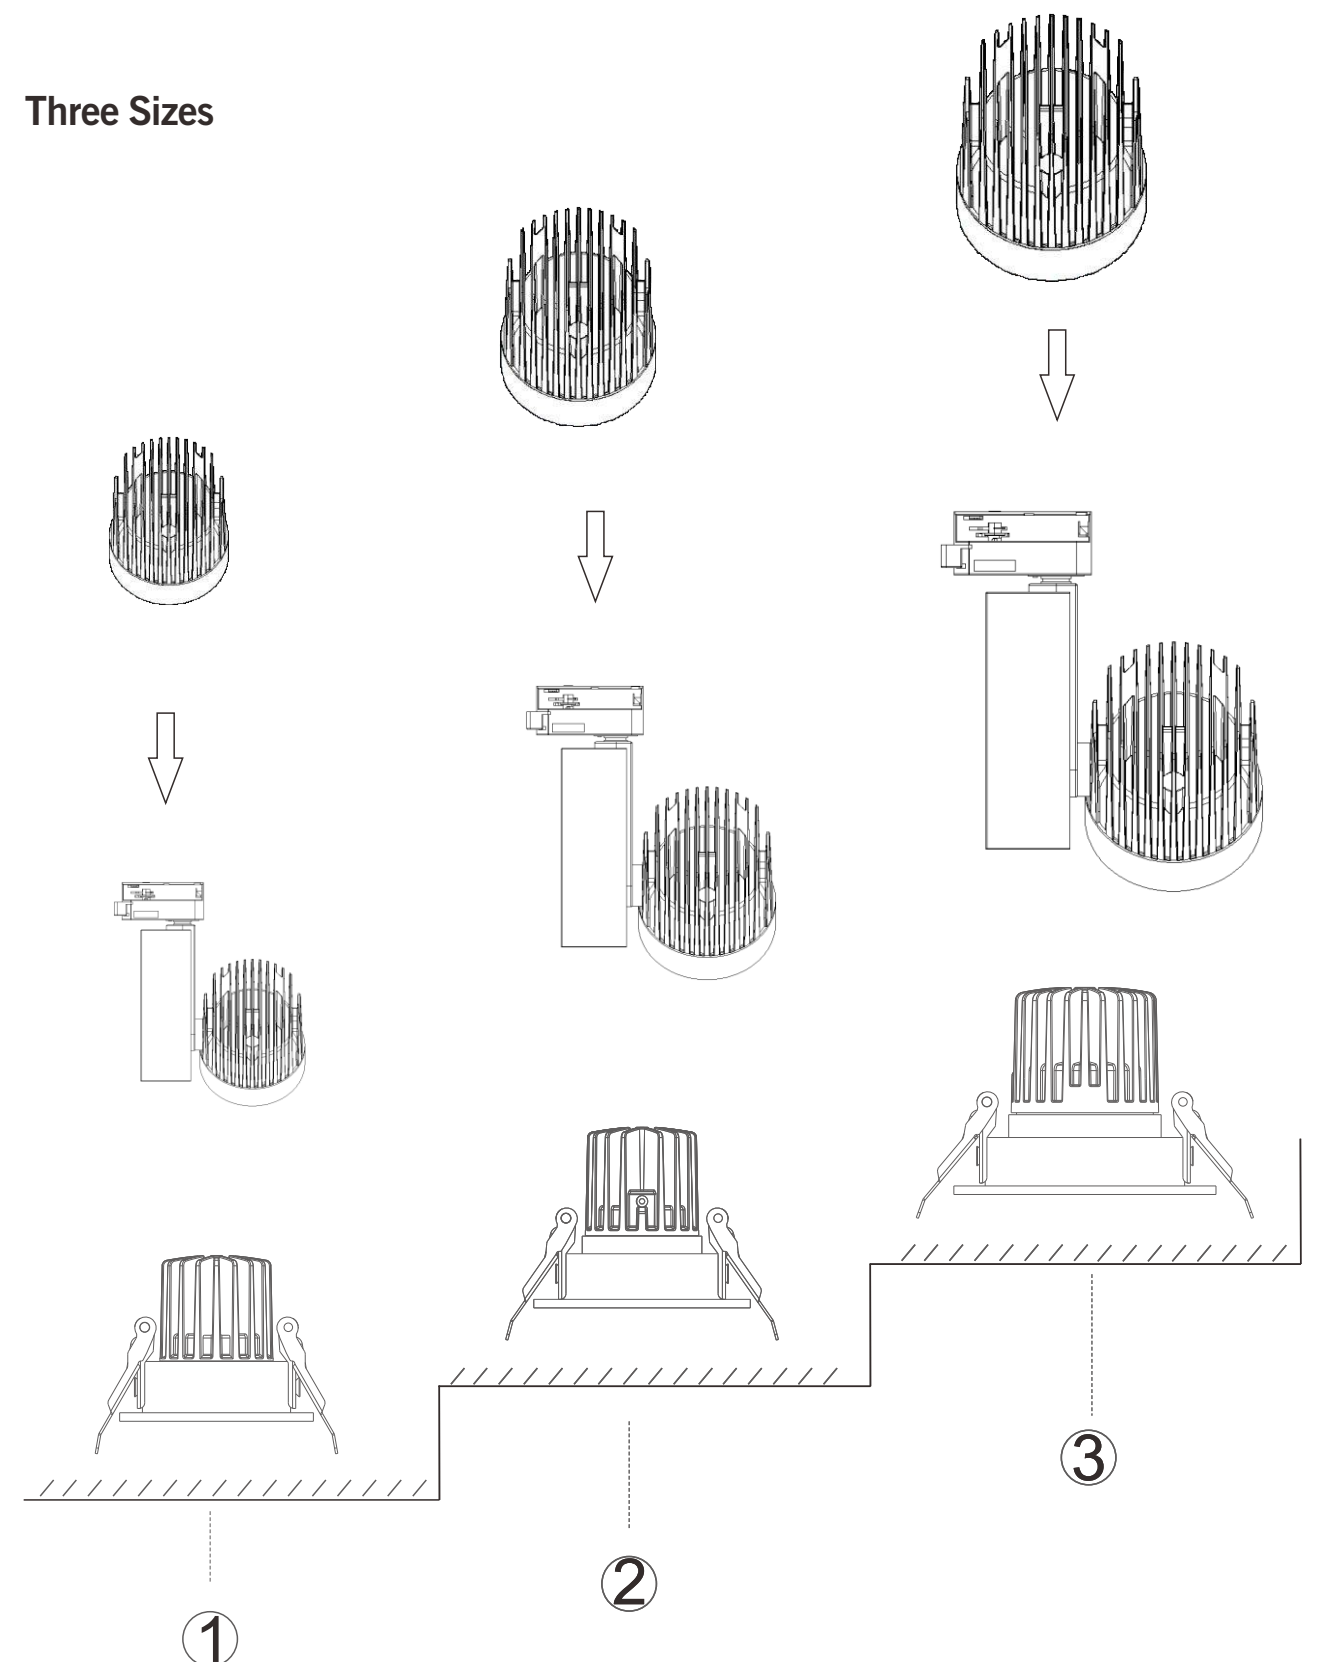



CCT: 3000K-4000K-5000K-6000K



COB

CRI >80


CRI >90

15°

30°

45°


Item No	Dimension(mm)	Power	Luminous
Z010101-10	Φ67	10W	800lm
Z010102-20	Φ87	20W	1600lm
Z010103-30	Φ107	30W	2400lm



Z010101-10					Z010102-20					Z010103-30				
COB		h(m)	E(lx)	D(cm)	COB		h(m)	E(lx)	D(cm)	COB		h(m)	E(lx)	D(cm)
8W		1	2480	44.22	15W		1	5657	40.01	30W		1	10631	42.19
		2	620	88.44			2	1414	80.01			2	2657	84.38
		3	276	132.65			3	628	120.02			3	1181	126.57



CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

30°

45°

Item No	Dimension(mm)	Power	Luminous
Z010201-10	Φ67	10W	800lm
Z010202-20	Φ87	20W	1600lm
Z010203-30	Φ107	30W	2400lm



Z010201-10					Z010202-20					Z010203-30				
COB		h(m)	E(lx)	D(cm)	COB		h(m)	E(lx)	D(cm)	COB		h(m)	E(lx)	D(cm)
8W		1	2480	44.22	15W		1	5657	40.01	25W		1	10631	42.19
		2	620	88.44			2	1414	80.01			2	2657	84.38
		3	276	132.65			3	628	120.02			3	1181	126.57

Simple Structure Easy to Install



CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

30°


45°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z030101-8	Φ67×65	Φ55	8W	640lm
Z030102-15	Φ87×82	Φ75	15W	1200lm
Z030103-25	Φ107×100	Φ95	25W	2000lm





CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

30°

45°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z030201-10	Φ80×69	Φ70	10W	800lm
Z030202-20	Φ100×95	Φ90	20W	1600lm
Z030203-30	Φ121×110	Φ110	30W	2400lm



CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

30°

45°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z020101-10	Φ90×81	Φ75	10W	800lm
Z020102-20	Φ110×106	Φ95	20W	1600lm
Z020103-30	Φ140×120	Φ120	30W	2400lm






EVER-CHANGING



More Decorative reflector available

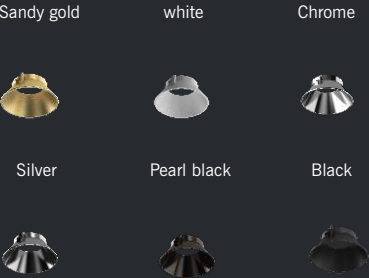



Rhombic filter



Fringe filter



Frosted filter



Honey filter

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

24°

38°

Item No	Cut out(mm)	Power	Luminous
Z110-6	Φ50	6W	480lmLM
Z110-12	Φ75	12WW	960lmM
Z110-20	Φ95	20WW	1600lm
Z110-30	Φ120	30WW	2400lm



Anti-dazzle



Elliptical




Circular

Surface treatment of color:

☐ White+Black ☐ White ☒ Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

24°

38°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110101-6	Φ60×73	Φ50	6W	480lm
Z110102-12	Φ86×104	Φ75	12W	960lm
Z110103-20	Φ105×119	Φ95	20W	1600lm
Z110104-30	Φ135×145	Φ120	30W	2400lm

Surface treatment of color:

☐ White+Black ☐ White ☒ Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80


CRI >90

15°

24°

38°


Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110105-6	Φ94×77	Φ50	6WW	480lm
Z110106-12	Φ127×104	Φ75	12W	960lm
Z110107-20	Φ163×118	Φ95	20WW	1600lm
Z110108-30	Φ186×147	Φ120	30W	2400lm

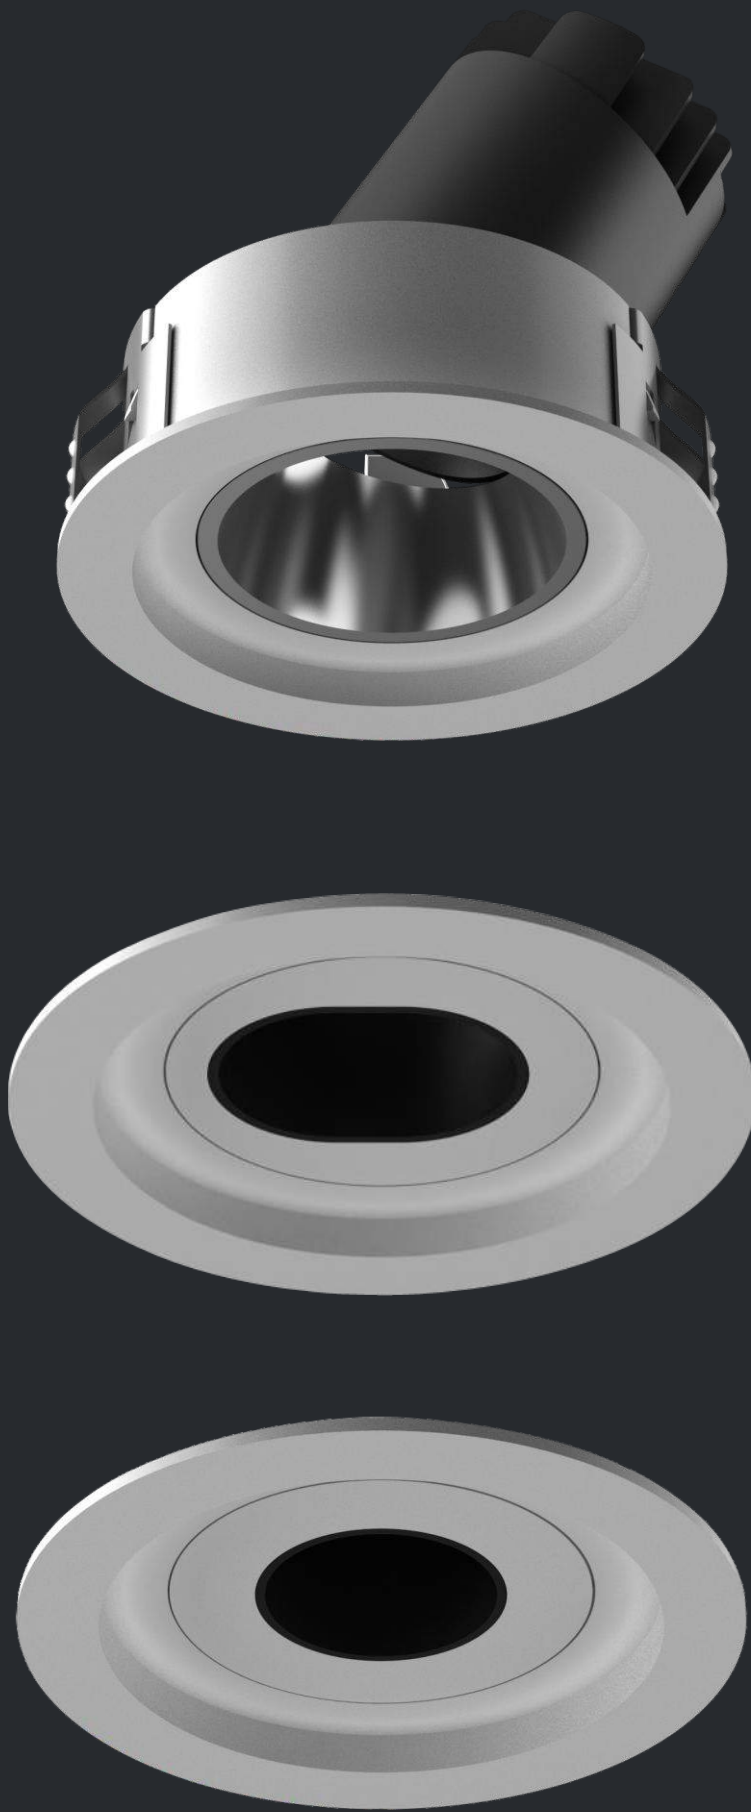

Surface treatment of color:

☒ White+Black ☐ White ☐ Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

24°

38°


Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110201-6×2	Φ140×80×81	Φ130×68	6W×2W	960lm
Z110202-12×2	Φ194×104×109	Φ182×92	12W×2W	1920lm
Z110203-20×2	Φ240×126×126	Φ226×113	20W×2W	3200lm
Z110204-30×2	Φ298×153×150	Φ282×138	30W×2W	4800lm



Surface treatment of color:

☒ White+Black ☐ White ☐ Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

24°

38°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110205-6×2	Φ172×68×81	Φ127×68	6W×2W	960lm
Z110206-12×2	Φ246×89×109	Φ182×92	12W×2W	1920lm
Z110207-20×2	Φ293×108×126	Φ226×113	20W×2W	3200lm
Z110208-30×2	Φ351×133×150	Φ282×136	30W×2W	4800lm






Surface treatment of color:

● White+Black ○ White ● Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80


CRI >90

15°

24°

38°


Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110301-6×3	Φ200×80×81	Φ190×68	6W×3W	1440lm

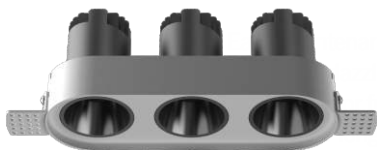

Surface treatment of color:

● White+Black ○ White ● Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

24°

38°


Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110302-6×3	Φ234×68×81	Φ188×68	6W×3W	1440lm



Surface treatment of color:

● White+Black ○ White ● Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

24°

38°


Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110401-6×4	Φ140×140×81	Φ130×130	6W×4W	1920lm



Surface treatment of color:

● White+Black ○ White ● Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

24°

38°


Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110402-6×4	Φ195×125×81	Φ128×128	6W×4W	1920lm






Multi angle adjustment

The lamp shooter can adjust the projection angle of the left and right lights in the vertical direction independently to meet the requirements of different directions of the lighting projection in the place.

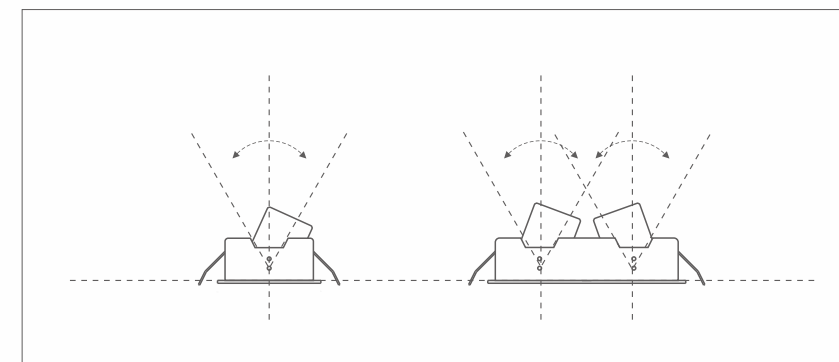

Application

Serialized single head and double head configuration to meet different lighting needs in different locations.

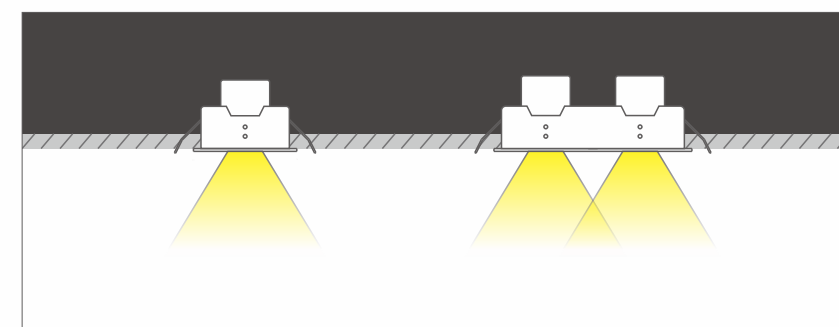




Easy maintenance structure innovation
Deep anti-dazzle
Optional color from multiple perspectives



Surface treatment of color:

☒ White+Black ☐ White ☐ Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80


CRI >90

15°


24°

38°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110501-6	60×60×73	Φ50	6WW	480lm
Z110502-12	86×86×104	Φ75	12WW	960lm
Z110503-20	106×106×119	Φ95	20WW	1600lm
Z110504-30	133×133×145	Φ120	30W	2400lm

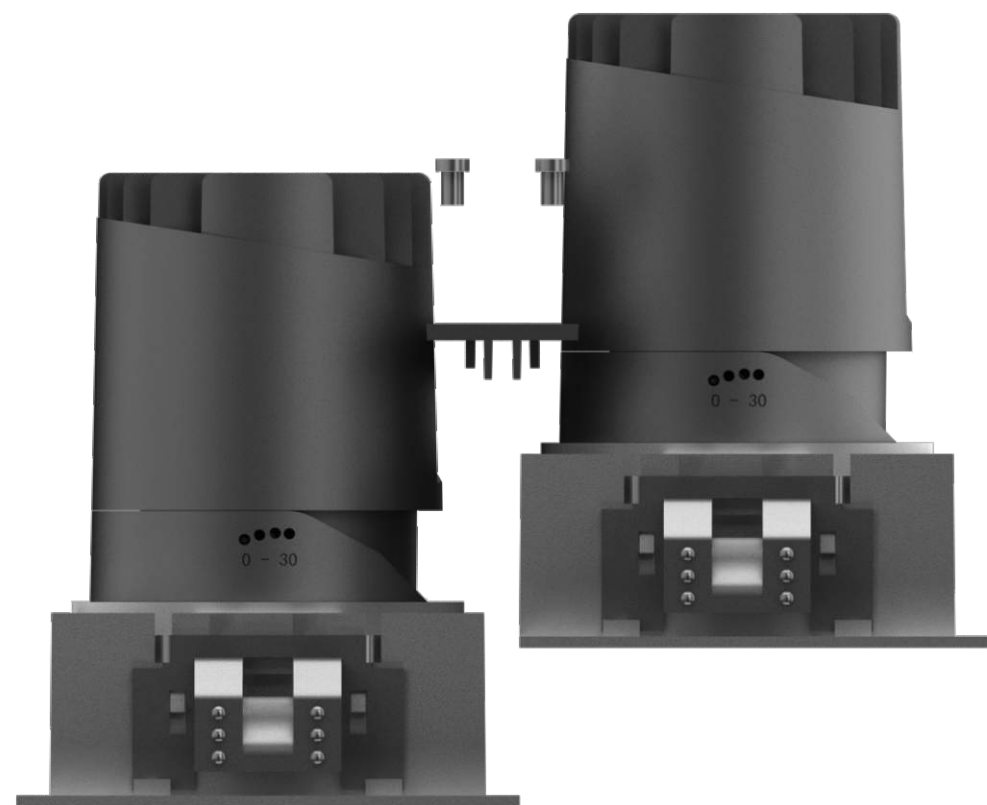

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

24°

38°


Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110601-12	89×89×119	82×82	12WW	960lm



Surface treatment of color:

☒ White+Black ☐ White ☐ Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

24°

38°


Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110602-12	134×89×119	82×82	12WW	960lm



Surface treatment of color:

☒ White+Black ☐ White ☐ Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

24°

38°


Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110701-12×2	172×89×121	163×82	12W×2W	1920lm



Surface treatment of color:

☒ White+Black ☐ White ☐ Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80



CRI >90

15°

24°

38°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z110702-12×2	227×82×121	163×82	12W×2W	1920lm

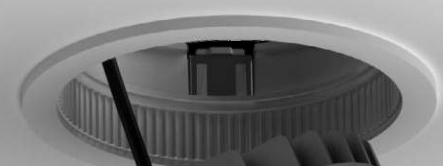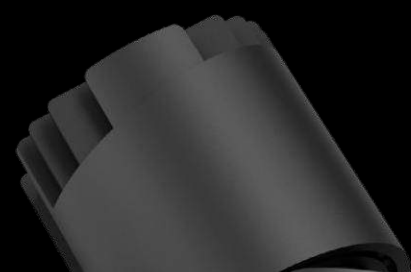

Pre-embedded design,
quick installation and
convenient maintenance





Applications: store, supermarket, hotel,
exhibition hall Etc.

LED Track Light Series


Track luminaire suit for accent lighting.





Anti-Glare LED Track Light

Trendy and seamless all-in-one fixture
40,000 hrs lifetime
Anti-glare concern for high-end usage

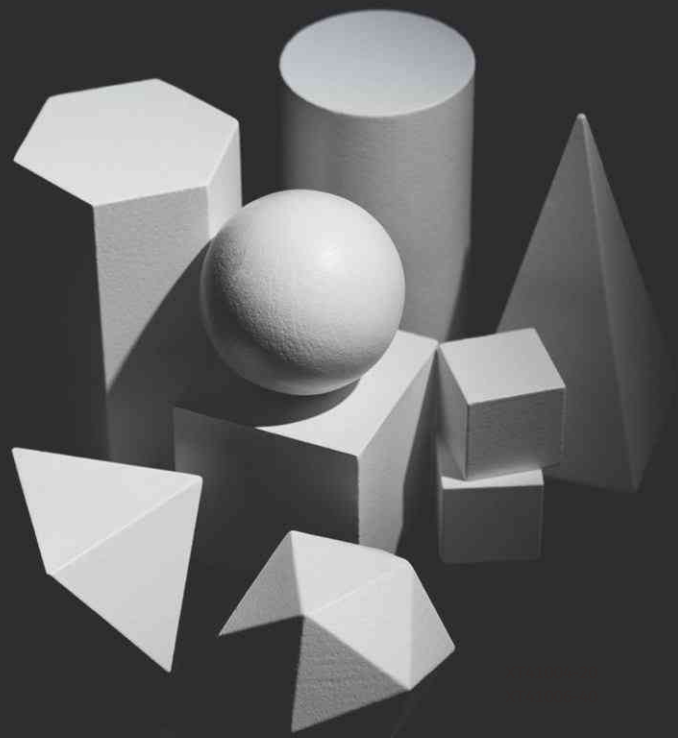


Surface treatment
of color:

- White+Black
- White
- Black



CCT: 3000K-4000K-5000K-6000K



- COB
- CRI >80
- CRI >90
- 15°
- 24°
- 36°

Item No	Dimension(mm)	Power	Luminous
Z010301-20	162×93×206(D95/110)	20W	1630lm
Z010302-30	162×93×226(D95/135)	30W	2590lm
Z010303-40	162×93×226(D95/150)	40W	3420lm
Z010304-50	173×107×226(D107/140)	50W	4000lm

z010301-20	DG10012-30
COB 20W	COB 30W
24°	24°
h(m) E(lx) D(cm)	h(m) E(lx) D(cm)
1 7818 39.10	1 10631 42.19
2 1955 78.20	2 2657 84.38
3 868 117.30	3 1181 126.57

DG10013-40	DG10014-50
COB 40W	COB 50W
24°	24°
h(m) E(lx) D(cm)	h(m) E(lx) D(cm)
1 13391 37.43	1 14970 34.98
2 3347 74.86	2 3742 69.96
3 1488 112.29	3 1664 104.95



LED Track Light

Efficiency, High Quality, Great Value,
Sleek and Clean Design.



HIGH CRI



CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90


15°

24°

38°

60°

Item No	Dimension(mm)	Power	Luminous
Z010401-20	L221×95×H210(D95/110)	20W	1630lm
Z010402-30	L221×95×H230(D95/130)	30W	2590lm
Z010403-40	L221×95×H250(D95/150)	40W	3420lm
Z010404-50	L221×107×H240(D107/140)	50W	4000lm




Z010401-20				Z010402-30			
COB	20W	h(m)	E(lx) D(cm)	COB	30W	h(m)	E(lx) D(cm)
		1	7818 39.10			1	10631 42.19
		2	1955 78.20			2	2657 84.38
		3	868 117.30			3	1181 126.57
Z010403-40				Z010404-50			
COB	40W	h(m)	E(lx) D(cm)	COB	50W	h(m)	E(lx) D(cm)
		1	13391 37.43			1	14970 34.98
		2	3347 74.86			2	3742 69.96
		3	1488 112.29			3	1664 104.95




LED Track Light

Efficiency, High Quality, Great Value,
Sleek and Clean Design.


optical accessories





Honeycomb mesh



Strip optical lens



Square optical lens

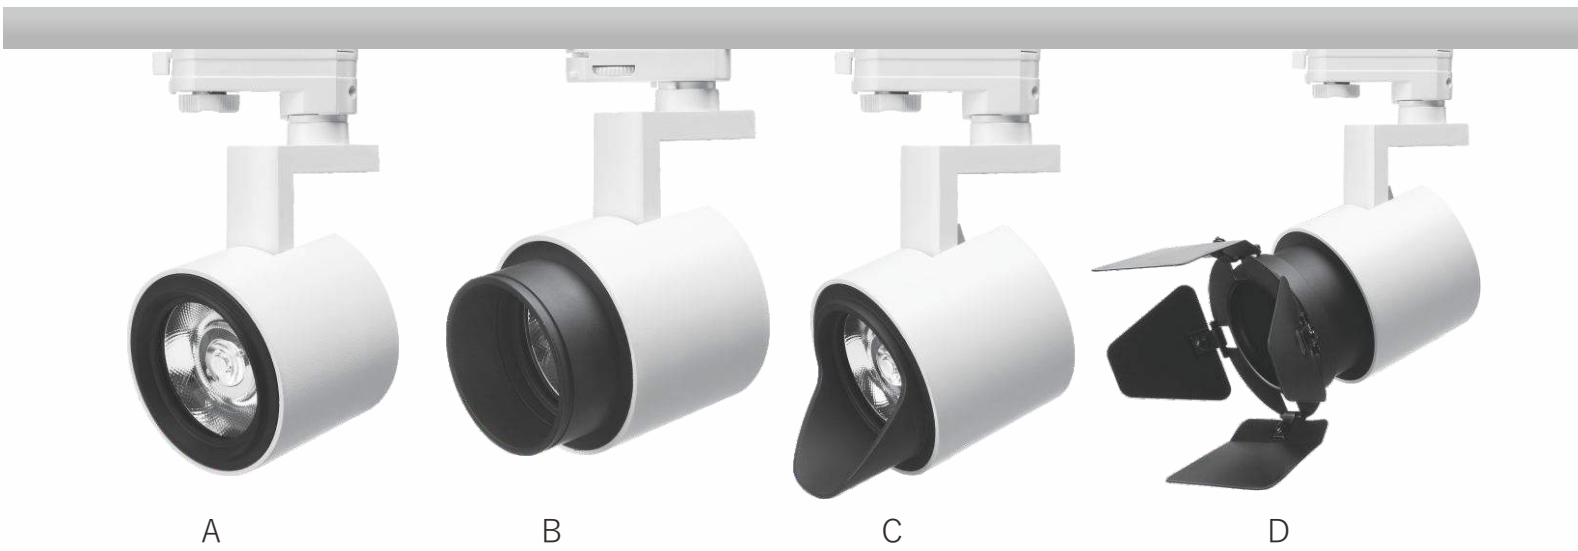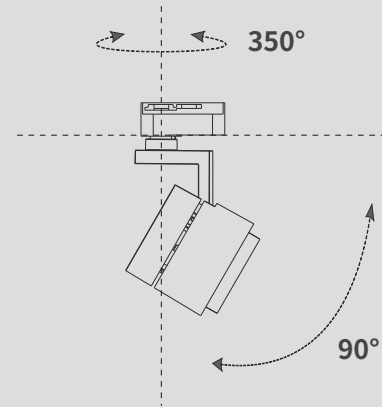


CCT: 3000K-4000K-5000K-6000K



COB	CRI >80	CRI >90	15°	24°	38°	60°
-----	---------	---------	-----	-----	-----	-----

Item No	Dimension(mm)	Power	Luminous
Z010501-15A	Φ94×78×188	15W	1200lm
Z010501-15B	Φ94×107×194	15W	1200lm
Z010501-15C	Φ94×123×201	15W	1200lm
Z010501-15D	126×177×252	15W	1200lm
Z010502-25A	Φ94×118×198	25W	2000lm
Z010502-25B	Φ94×135×198	25W	2000lm
Z010502-25C	Φ94×148×198	25W	2000lm
Z010502-25D	Φ126×205×198	25W	2000lm




Ⓐ Anti glare with small convex mouth



Ⓑ Anti convexity with lengthened convex mouth



Ⓒ Oblique mouth anti glare



Ⓓ Four leaf anti glare



Z010501-15A				
COB	h(m)	E(lx)	D(cm)	
15W	1	5657	40.01	
2	1414	80.01		
3	628	120.02		

Z010502-25A				
COB	h(m)	E(lx)	D(cm)	
25W	1	9772	39.51	
2	2443	79.20		
3	1085	118.30		




LED Track Light

Efficiency, High Quality, Great Value,
Sleek and Clean Design.



High brightness
Good heat dissipation

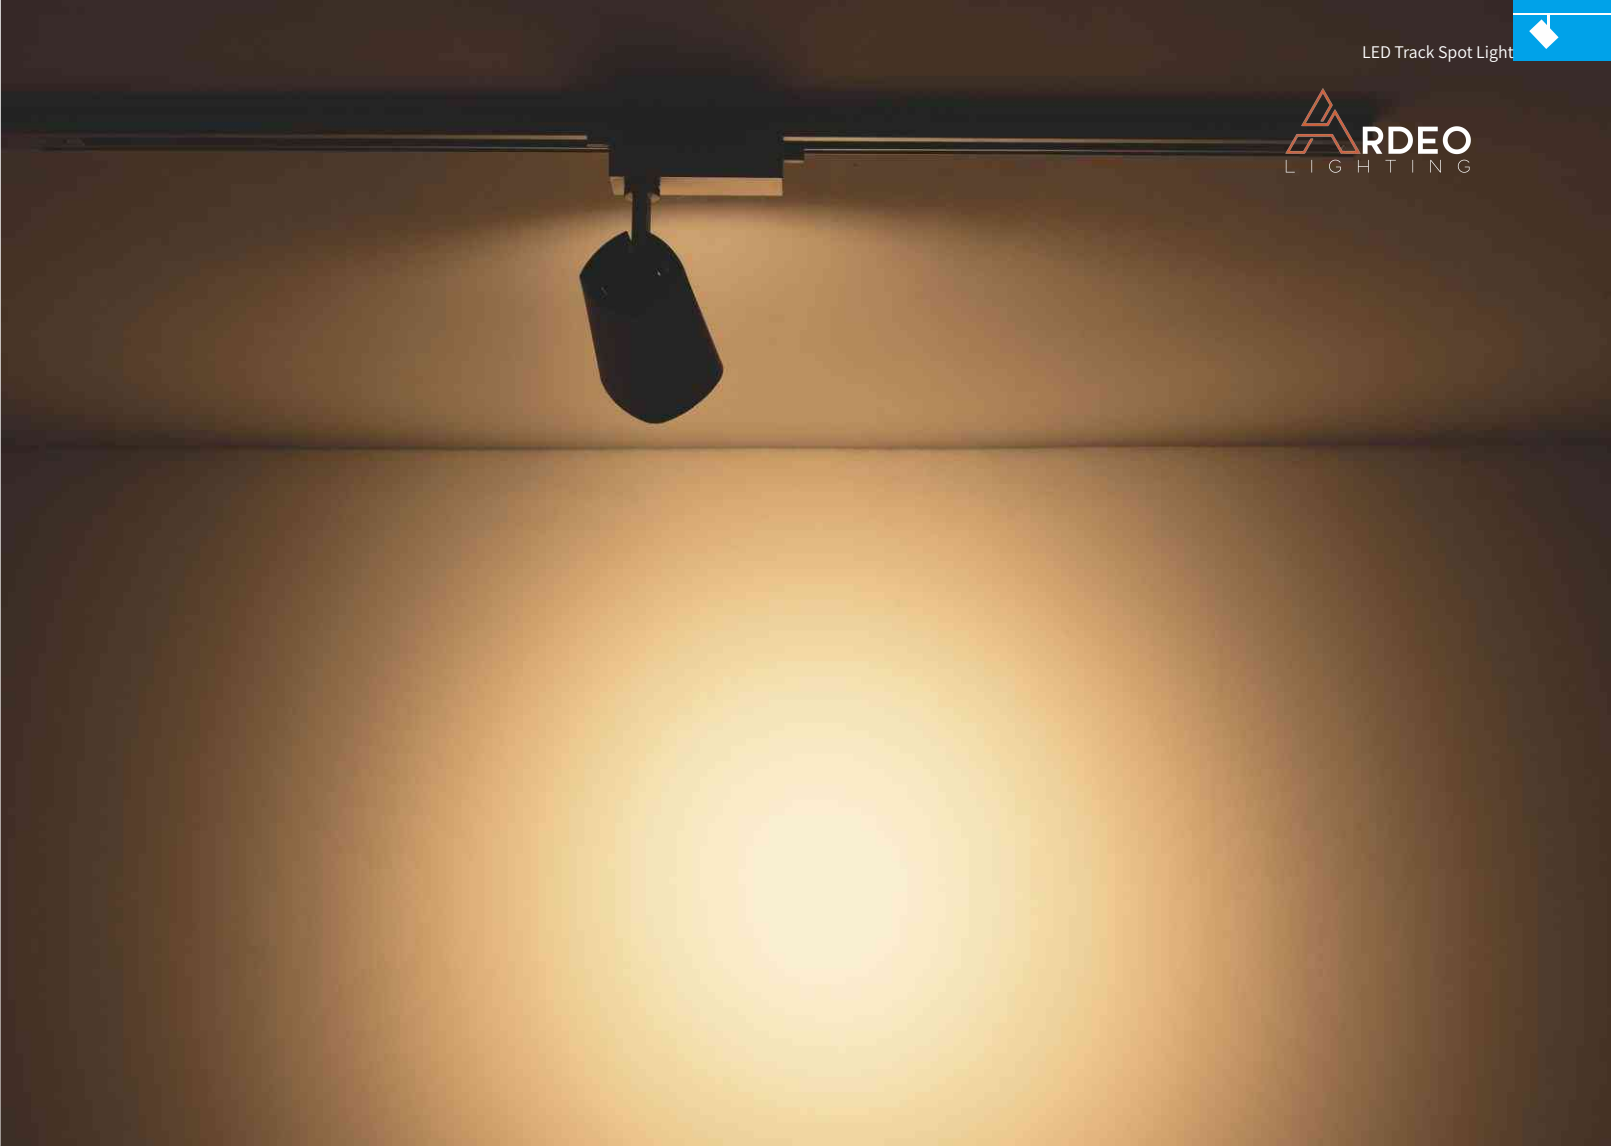

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90


15°

24°

38°

60°

Item No	Dimension(mm)	Power	Luminous
Z010601-20	76×110×150(D×A×H)	20W	1600lm
Z010602-30	90×119×162(D×A×H)	30W	2400lm

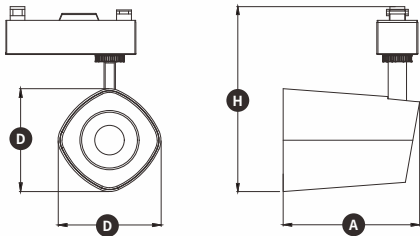



Surface treatment
of color:


- White+Black
- White
- Black

CCT: 3000K-4000K-5000K-6000K



- COB
- CRI >80
- CRI >90
- 15°
- 24°
- 36°
- 60°

Item No	Dimension(mm)	Power	Luminous
Z010701-12	Φ56×118×138	12W	960lm
Z010702-24	Φ56×155×138	24W	2000lm
Z010703-34	Φ72×155×156	34W	2800lm



Z010701-12					
COB	h(m)	E(lx)	D(cm)		
12W 24°	1	2825	50.88		
	2	706	101.75		
	3	314	152.63		

Z010702-24					
COB	h(m)	E(lx)	D(cm)		
24W 24°	1	9772	39.51		
	2	2443	79.20		
	3	1085	118.30		



Surface treatment
of color:

White+Black White Black



Surface treatment
of color:

White+Black White Black





CCT: 3000K-4000K-5000K-6000K




COB	CRI >80	CRI >90	15°	24°	38°	60°
-----	---------	---------	-----	-----	-----	-----

Item No	Dimension(mm)	Power	Luminous
Z010801-15	Φ63× 100× 127	15W	1200lm
Z010802-30	Φ80× 125× 160	30W	2400lm
Z010803-36	Φ93× 135× 166	36W	2880lm





350°

CCT: 3000K-4000K-5000K-6000K



COB	15°	20°	36°
-----	-----	-----	-----


Item No	Dimension(mm)	Power	Luminous
Z010901-20	74× 137× 214	20W	1630lm

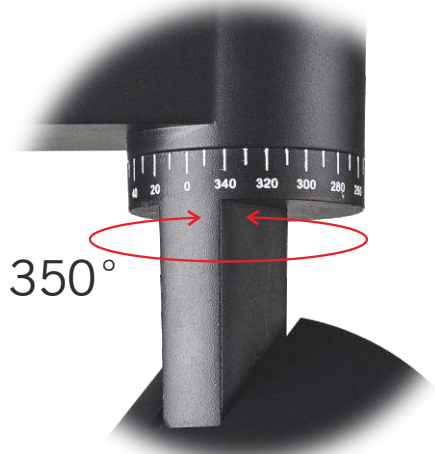

350°



Track System

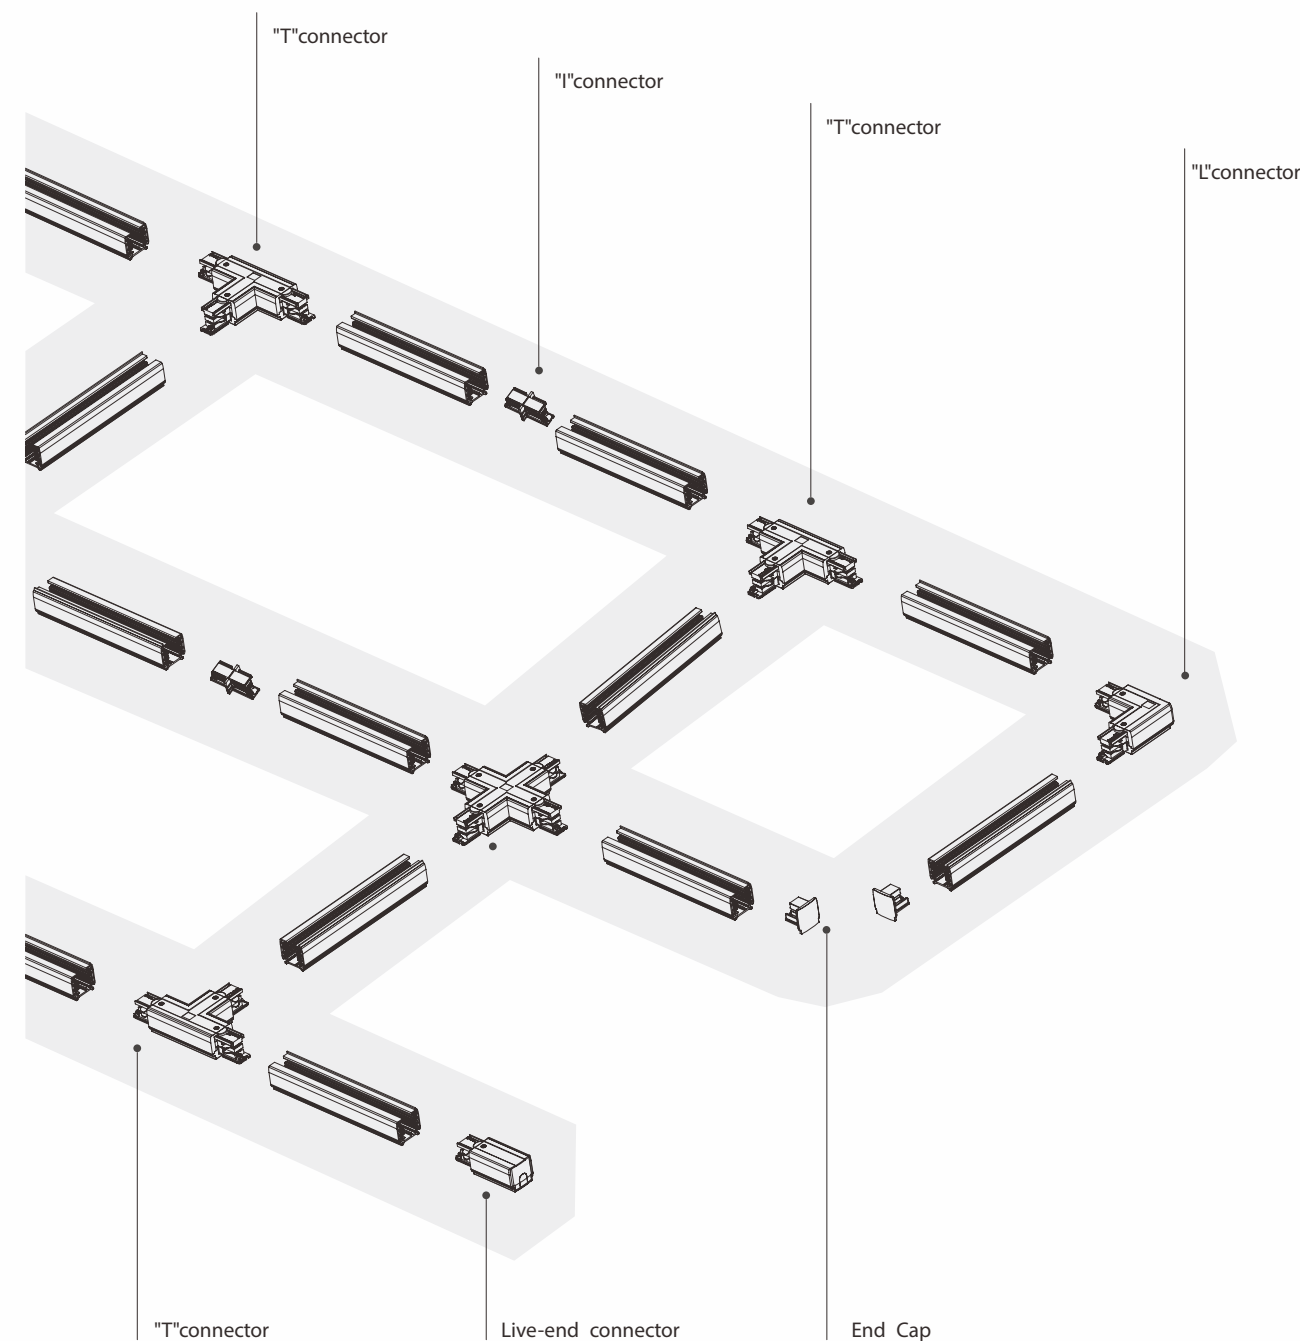

Track System

Track Adaptor



2 Wires Single-circuit



3 Wires Single-circuit



4 Wires 3 circuits

Track



2 Wires Track



3 Wires Track



4 Wires Track

Track Connector



Live-end connector



End cap



"I"connector



"L"connector



"T"connector



Adjustable "L"connector



Suspension kit

Other Installation Way



Recessed
Cut out : $\Phi 75\text{mm}$




Surface Mounted
Size : $\Phi 60 \times 30\text{mm}$



LED Spot Light Series

Applicable scenario: store, supermarket, hotel, exhibition hall Etc.

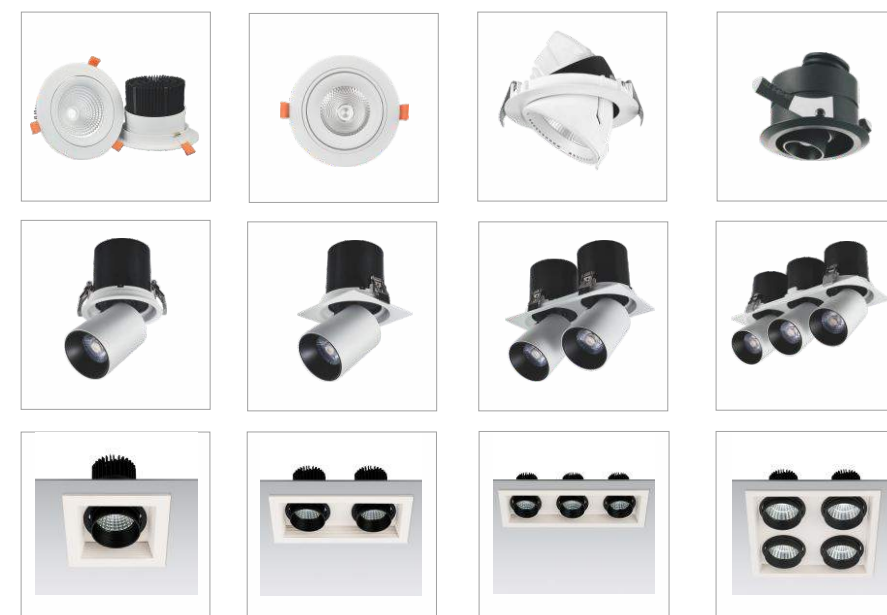




Aluminum extrusion
Rapid cooling

LED Spot Light

Exclusive shop,supermarket,hotel,exhibition hall

CCT: 3000K-4000K-5000K-6000K



COB CRI >80 CRI >90

15° 24° 30° 36° 38° 40° 45° 60°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous	Beam Angle
Z020201-5	Φ95×H59	Φ70	5W	400lm	30°
Z020202-8	Φ95×H79	Φ70	8W	640lm	30°
Z020203-8	Φ111×H88	Φ80	8W	640lm	24°/36°
Z020204-12	Φ119×H103	Φ90	12W	960lm	15°/24°/38°/60°
Z020205-25	Φ142×H118	Φ110	25W	2000lm	24°/60°
Z020206-30	Φ150×H126	Φ130	30W	2400lm	24°/40°/60°
Z020207-35	Φ180×H128.5	Φ145	35W	2800lm	24°/40°/60°
Z020208-40	Φ180×H148.5	Φ145	40W	3200lm	24°/40°/60°
Z020209-45	Φ194×H129	Φ158	45W	3600lm	24°/40°/60°
Z020210-55	Φ194×H149	Φ158	55W	4400lm	24°/40°/60°
Z020211-40	Φ233×H129	Φ210	40W	3200lm	24°/45°/60°
Z020212-55	Φ233×H149	Φ210	55W	4400lm	24°/45°/60°
Z020213-70	Φ233×H169	Φ210	70W	5600lm	24°/45°/60°



adjustable

LED Spot Light




Surface treatment
of color:

White+Black White Black





CCT: 3000K-4000K-5000K-6000K



COB CRI >80 CRI >90 15° 24° 30° 38° 40° 60°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous	Beam Angle
Z020301-5	Φ90×63	Φ80	5W	400lm	30°
Z020302-8	Φ90×85	Φ80	8W	640lm	30°
Z020303-10	Φ109×105	Φ95	10W	800lm	15°/24°/38°/60°
Z020304-25	Φ134×111	Φ120	25W	2000lm	24°/60°
Z020305-25	Φ162×126	Φ140	25W	2000lm	24°/40°/60°
Z020306-40	Φ178×127	Φ160	40W	3200lm	24°/40°/60°



360°



90° adjustable in vertical, 360° in circle




LED Spot Light



Surface treatment
of color:

- White+Black
- White
- Black



90° adjustable in vertical,
360° in circle

CCT: 3000K-4000K-5000K-6000K




- COB
- CRI >80
- CRI >90
- 15°
- 24°
- 36°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z020402-15	Φ130×H110	Φ120	15W	1200lm
Z020403-30	Φ165×H145	Φ155	30W	2590lm
Z020404-40	Φ190×H155	Φ170	40W	3420lm


Z020401-8					Z020402-15				
COB	h(m)	E(lx)	D(cm)		COB	h(m)	E(lx)	D(cm)	
8W	1	2480	44.22		15W	1	5657	40.01	
	2	620	88.44			2	1414	80.01	
	3	276	132.65			3	628	120.02	
24°					24°				

Z020403-30					Z020404-40				
COB	h(m)	E(lx)	D(cm)		COB	h(m)	E(lx)	D(cm)	
30W	1	10631	42.19		40W	1	13391	37.43	
	2	2657	84.38			2	3347	74.86	
	3	1181	126.57			3	1488	112.29	
24°					24°				

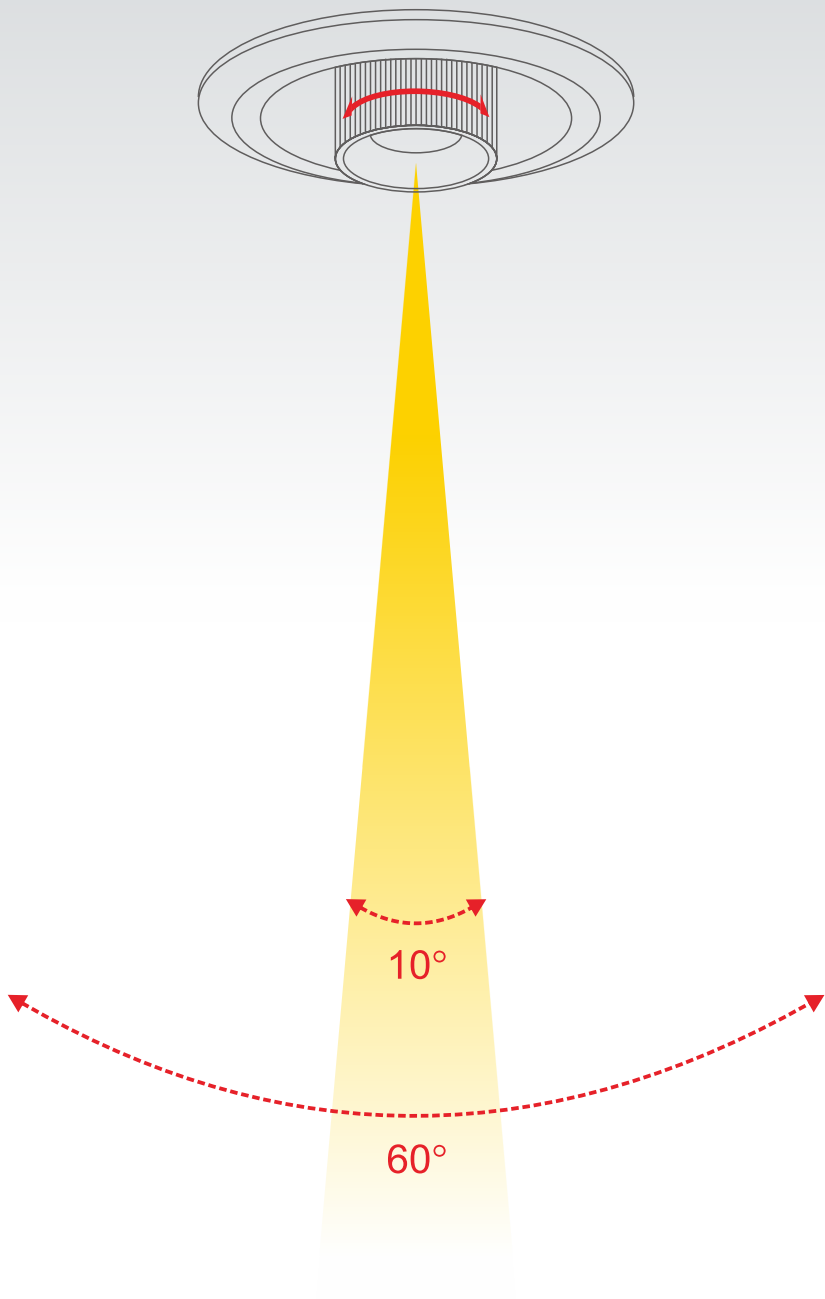


LED Spot Light


Optical zoom: 10° –60°





Power:3W
Beam angle: 15°

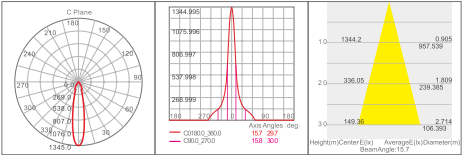

Power:3W
Beam angle: 24°

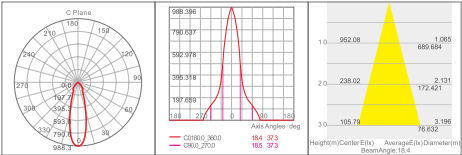

Power:3W
Beam angle:36°

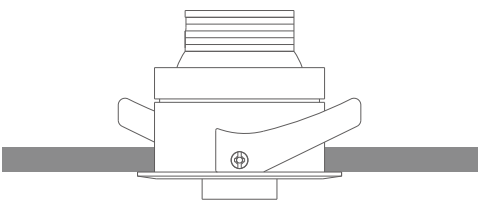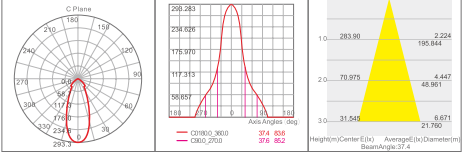

Φ57mm



Φ50mm

CCT: 3000K-4000K-5000K-6000K



Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z020401-8	Ø57*49mm	Ø50mm	3W	240lm

Surface treatment of color: ☐ White ☒ Black





Adjustable Angle
High show refers to



High Brightness




Uniform Luminescence
High Colour

White+Black White Black

CCT: 3000K-4000K-5000K-6000K

COB CRI >80 CRI >90 15° 24° 36°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z020601-12	Φ100× 112	Φ90	12W	996lm
Z020602-25	Φ130× 130	Φ120	25W	2125lm/lm
Z020603-35	Φ158× 155	Φ140	35W	2975lm/lm

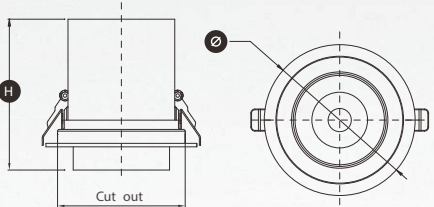

Z020601-12				
COB	h(m)	E(lx)	D(cm)	
12W 24°	1	2825	50.88	
	2	706	101.75	
	3	314	152.63	

Z020602-25				
COB	h(m)	E(lx)	D(cm)	
25W 24°	1	9772	39.51	
	2	2443	79.20	
	3	1085	118.30	

Telescopic LED Spot Light

Exclusive shop,supermarket,hotel,exhibition hall





Uniform Luminescence
High Colour



Telescopic rotating lamp
Contracted fashion

Telescopic LED Spot Light

Exclusive shop,supermarket,hotel,exhibition hall



Surface treatment of color:

● White+Black ○ White ● Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90


15°


24°

36°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z020604-12	100×L100×H112	Φ90	12W	996lm
Z020605-25	130×L130×H112	Φ120	25W	2125lm

Z020604-12					Z020605-25				
COB		h(m)	E(lx)	D(cm)	COB		h(m)	E(lx)	D(cm)
15W		1	5657	40.01	25W		1	9772	39.51
		2	1414	80.01			2	2443	79.20
		3	628	120.02			3	1085	118.30
24°					24°				

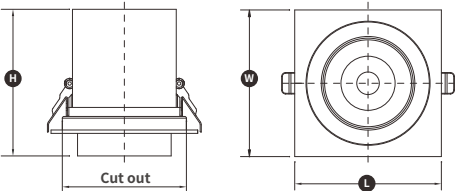

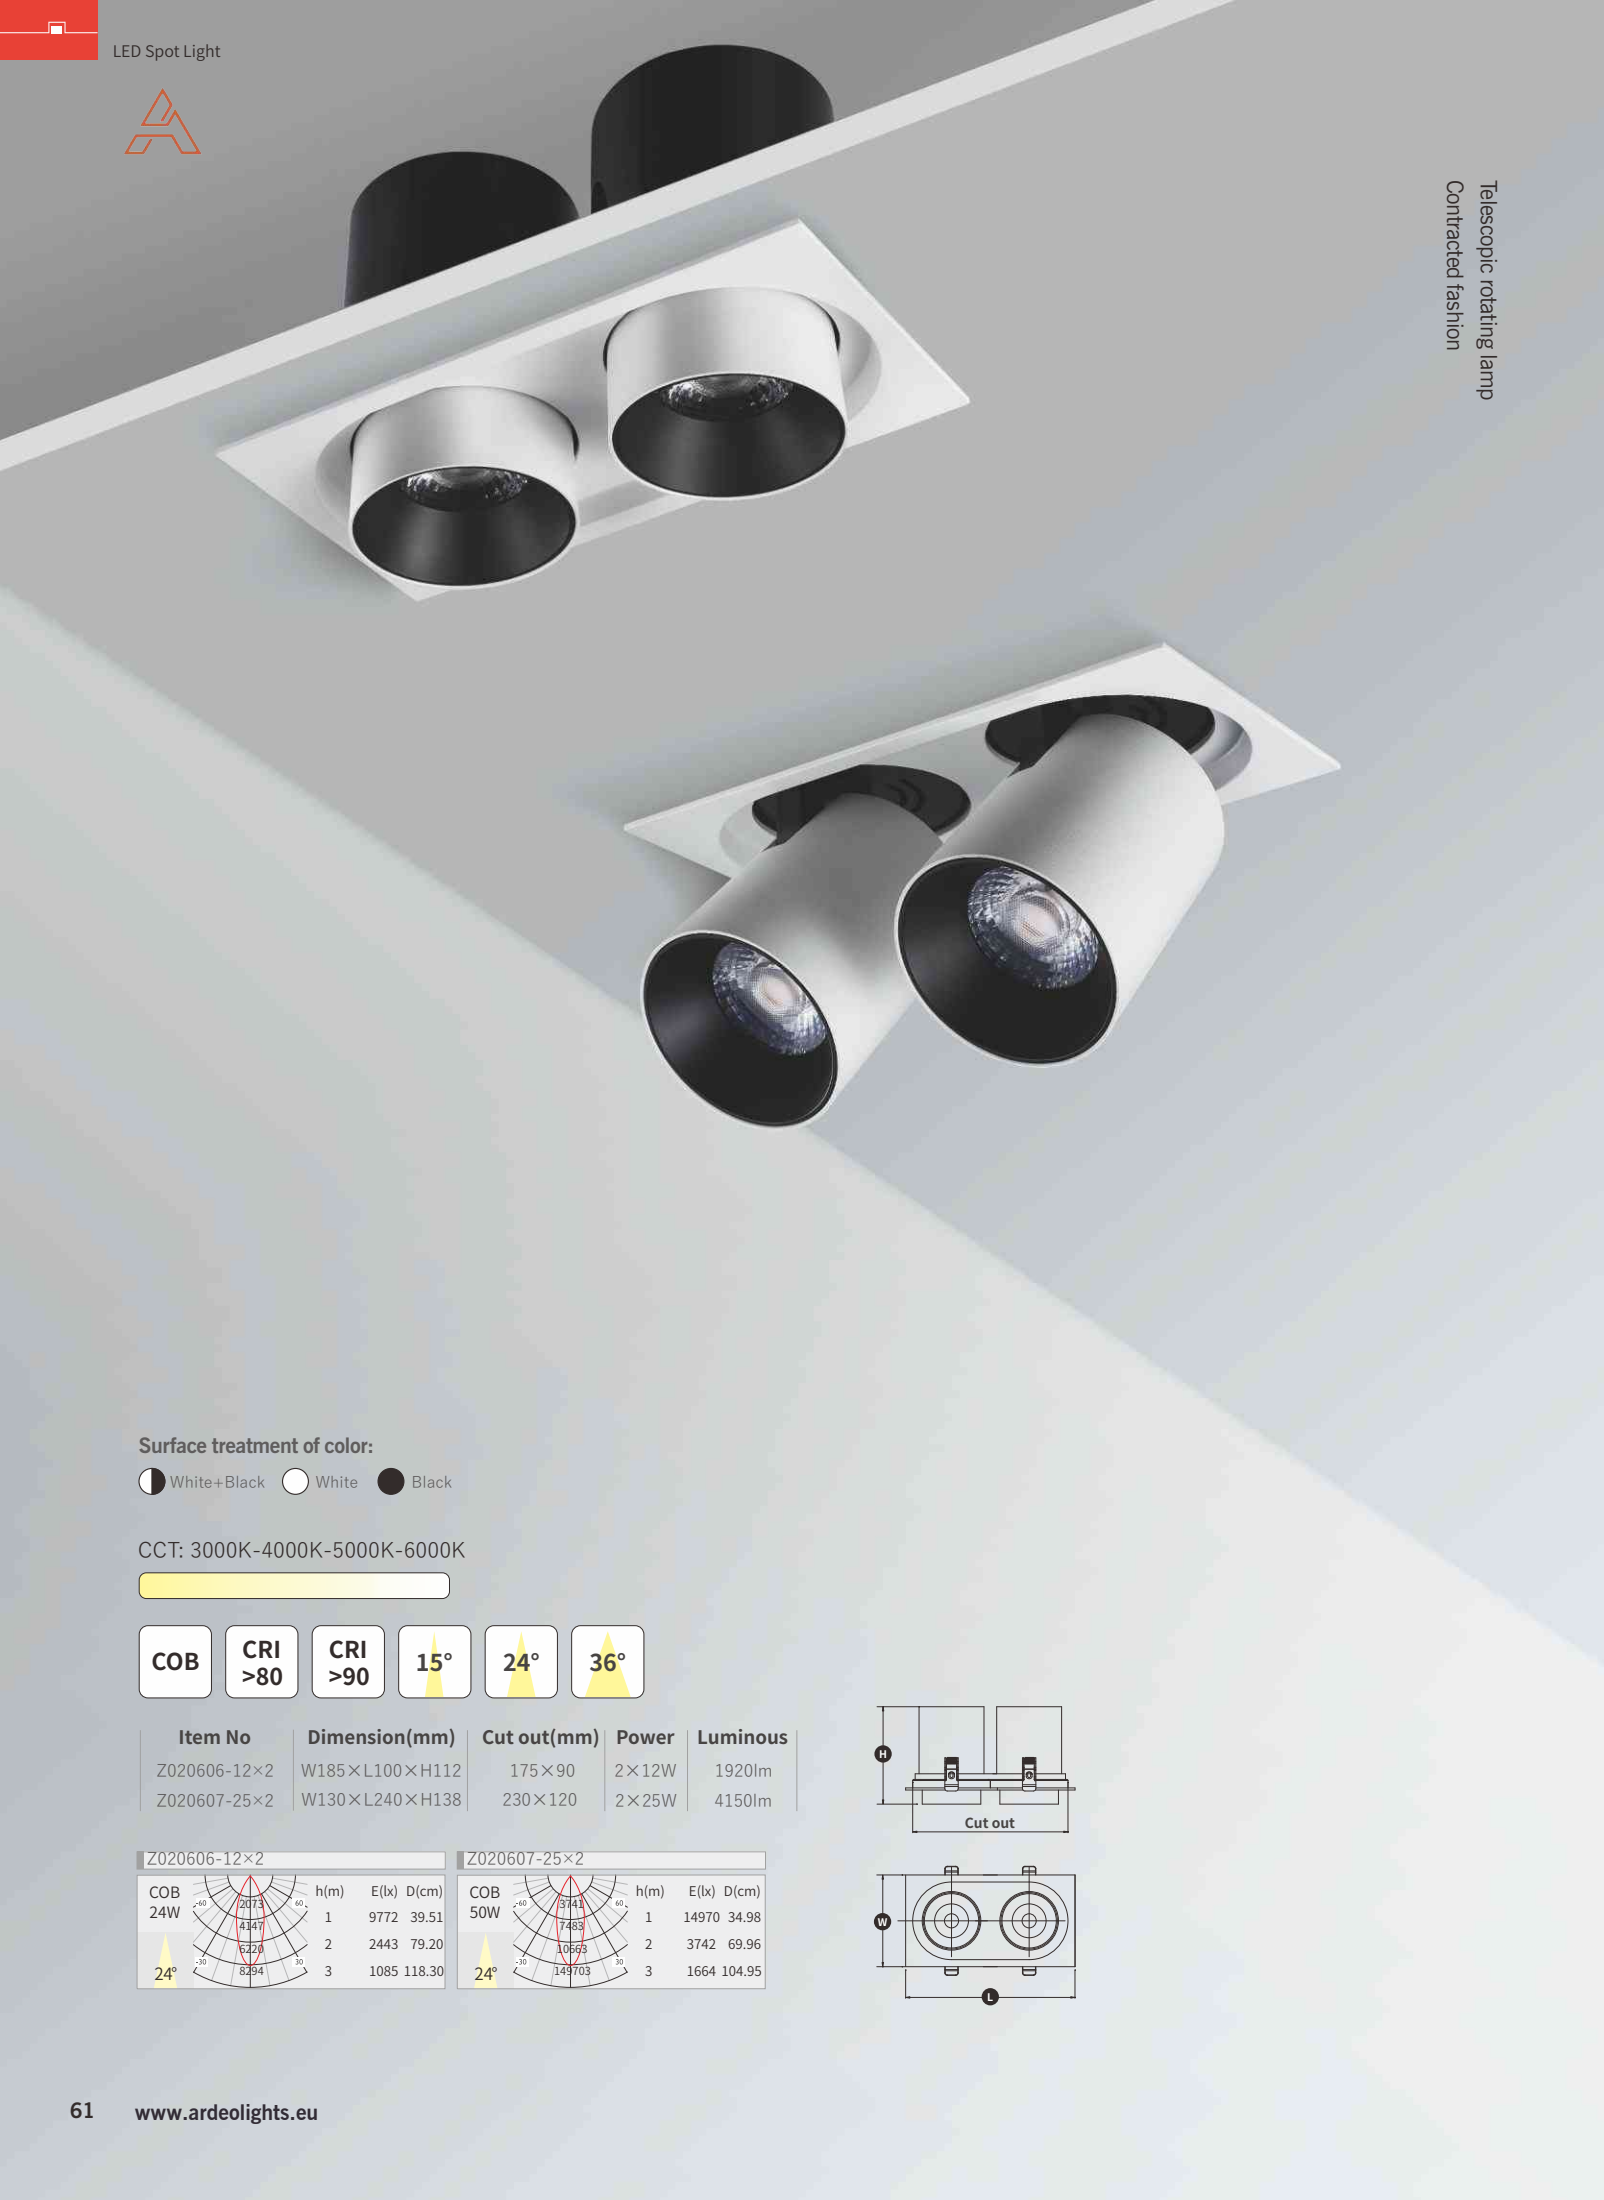


Telescopic rotating lamp
Contracted fashion

Surface treatment of color:

● White+Black ● White ● Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90


15°

24°

36°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z020606-12×2	W185×L100×H112	175×90	2×12W	1920lm
Z020607-25×2	W130×L240×H138	230×120	2×25W	4150lm

Z020606-12×2				Z020607-25×2			
COB	24W	h(m)	E(lx) D(cm)	COB	50W	h(m)	E(lx) D(cm)
24°	2073	1	9772 39.51	24°	5741	1	14970 34.98
	4347	2	2443 79.20		7483	2	3742 69.96
	6278	3	1085 118.30		10668	3	1664 104.95
	8234				149703		



Telescopic LED Spot Light

Exclusive shop,supermarket,hotel,exhibition hall





Uniform Luminescence
High Colour



Telescopic LED Spot Light

Efficiency, High Quality, Great Value,
Sleek and Clean Design.

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80





CRI >90

15°

24°

36°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z020608-12×3	W100×L268×H112	260×90	3×12W	2988lm
Z020609-25×3	W130×L342×H138	330×120	3×25W	6225lm



Rapid cooling

Intelligent drive

Highlighting the chip






LED Down Light

Very homogenous light
Functional design
Easy installation with fast connection

White+Black White Black

CCT: 3000K-4000K-5000K-6000K



COB CRI >80 CRI >90 15° 24° 38° 60°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z020701-9	L116×W116×H90	100×100	9W	765lm
Z020702-15	L144×W144×H110	125×125	15W	1275lm
Z020703-25	L164×W164×H113	145×145	25W	2125lm
Z020704-35	L184×W184×H115	165×165	35W	2975lm





LED Down Light

Very homogenous light
Functional design
Easy installation with fast connection

White+Black White Black

CCT: 3000K-4000K-5000K-6000K



- COB
- CRI >80
- CRI >90
- 15°
- 24°
- 38°
- 60°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z020705-18	L116×W222×H90	100×200	2×9W	1530lm
Z020706-30	L144×W272×H110	125×250	2×15W	2550lm
Z020707-50	L164×W313×H113	145×290	2×25W	4250lm
Z020708-70	L184×W354×H115	165×330	2×35W	5950lm



LED Down Light

Very homogenous light
Functional design
Easy installation with fast connection

White+Black White Black

CCT: 3000K-4000K-5000K-6000K



- COB
- CRI >80
- CRI >90
- 15°
- 24°
- 38°
- 60°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z020709-27	L116×W324×H90	100×300	3×9W	2295lm
Z020710-45	L144×W400×H110	125×375	3×15W	3825lm
Z020711-75	L164×W462×H113	145×440	3×25W	6375lm
Z020712-105	L184×W524×H115	165×500	3×35W	8925lm





LED Down Light

Very homogenous light
Functional design
Easy installation with fast connection

- White+Black
- White
- Black

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

15°

24°

38°

60°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z020713-36	L222×W222×H90	200×200	4×9W	3060lm
Z020714-60	L272×W272×H110	250×250	4×15W	5100lm
Z020715-100	L313×W313×H113	290×290	4×25W	8500lm
Z020716-140	L354×W354×H115	330×330	4×35W	11900lm





LED Down Light Series

Applications: store, supermarket, hotel, exhibition hall Etc.


Heat faster
Adjustable angle
Long life

Efficiency, High Quality,
Great Value,
Sleek and Clean Design.





Efficiency, High Quality,
Great Value,
Sleek and Clean Design.

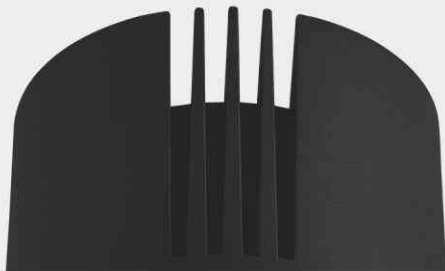

LED Down Light

Very homogenous light
Easy installation with fast connection

Heat faster
Adjustable angle
Long life




More Decorative reflector available:



CCT: 3000K-4000K-5000K-6000K





Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z030301-9	Φ88×70	Φ75	9W	720lm
Z030302-12	Φ100×77	Φ90	12W	960lm
Z030303-18	Φ110×85	Φ100	18W	1440lm
Z030304-30	Φ135×103	Φ125	30W	2400lm
Z030305-45	Φ165×120	Φ150	45W	3600lm

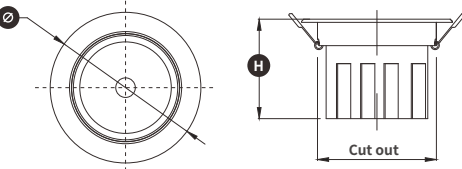




LED Down Light

LED Down Light



CCT: 3000K-4000K-5000K-6000K



COB

CRI
>80

CRI
>90

45°


Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z030401-10	Φ95×48	Φ80	10W	789lm
Z030402-15	Φ118×58	Φ100	15W	1150lm
Z030403-20	Φ136×69	Φ120	20W	1640lm
Z030404-30	Φ165×79	Φ140	30W	2550lm
Z030405-40	Φ198×93.5	Φ170	40W	3385lm
Z030406-50	Φ220×100	Φ200	50W	4250lm

Surface treatment of color: ☒ White+Black ☐ White ☐ Black

LED Down Light

Z030401-10 COB 10W 24° h(m) E(lx) D(cm) 1 2480 44.22 2 620 88.44 3 276 132.65	Z030402-15 COB 15W 24° h(m) E(lx) D(cm) 1 5657 40.01 2 1414 80.01 3 628 120.02	Z030403-20 COB 20W 24° h(m) E(lx) D(cm) 1 7818 39.10 2 1955 78.20 3 868 117.30
Z030404-30 COB 30W 24° h(m) E(lx) D(cm) 1 10631 42.19 2 2657 84.38 3 1181 126.57	Z030405-40 COB 40W 24° h(m) E(lx) D(cm) 1 13391 37.43 2 3347 74.86 3 1488 112.29	Z030406-50 COB 50W 24° h(m) E(lx) D(cm) 1 14970 34.98 2 3742 69.96 3 1664 104.95



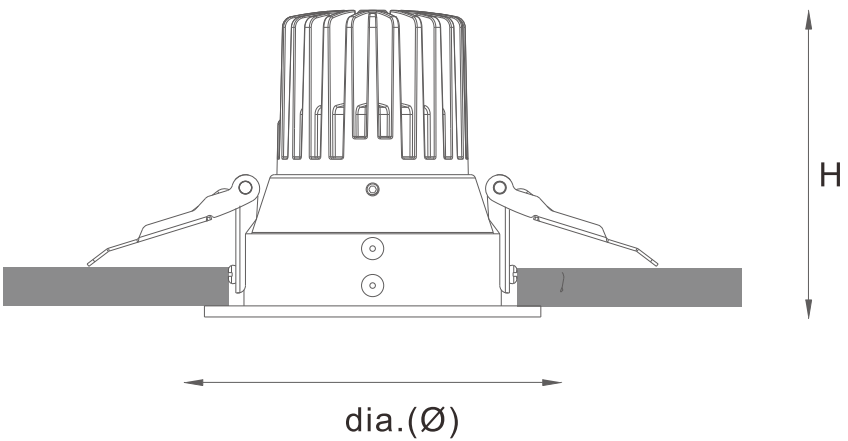

CCT: 3000K-4000K-5000K-6000K



COB

CRI >80

CRI >90

24°


38°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z030501-8	Φ91×83	Φ75	8W	640lm
Z030502-12	Φ109×91.5	Φ95	12W	960lm
Z030503-15	Φ138×129	Φ125	15W	1200lm
Z030504-20	Φ138×129	Φ125	20W	1600lm
Z030505-30	Φ169×148.5	Φ150	30W	2400lm
Z030506-40	Φ169×148.5	Φ150	40W	3200lm
Z030507-50	Φ190×163	Φ170	40W	3200lm
Z030508-50	Φ240×192.5	Φ210	50W	4000lm


Surface treatment of color: ☐ White


LED Down Light

Power:12W
Beam angle: 24°

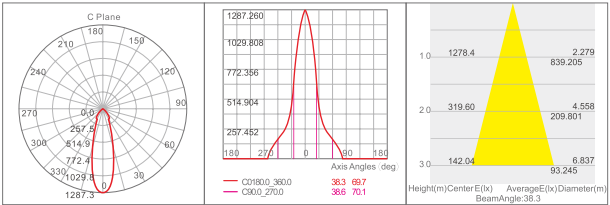

Power:12W
Beam angle: 40°

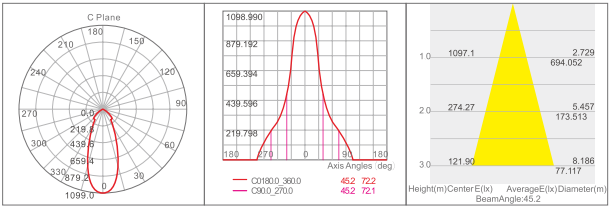

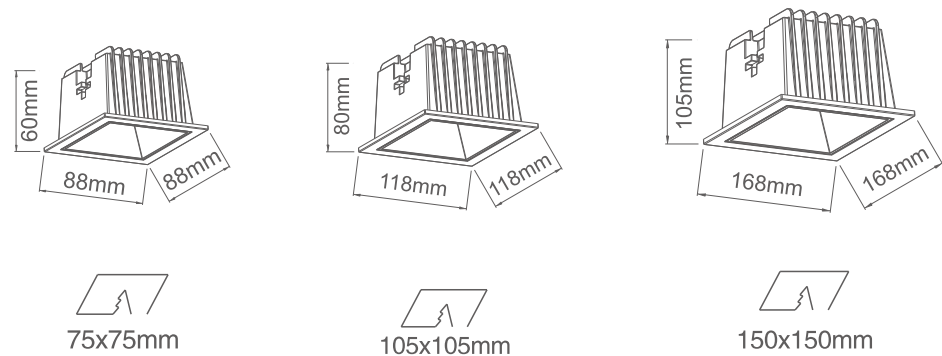



CCT: 3000K-4000K-5000K-6000K






Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z030601-8	88×88×60	75×75	8W	640lm
Z030602-12	88×88×60	75×75	12W	960lm
Z030603-15	88×88×60	75×75	15W	1200lm
Z030604-20	118×118×80	105×105	20W	1600lm
Z030605-25	118×118×80	105×105	25W	2000lm
Z030606-40	168×168×105	150×150	40W	3200lm
Z030607-50	168×168×105	150×150	50W	4000lm

Surface treatment of color: ☐ White

LED Down Light

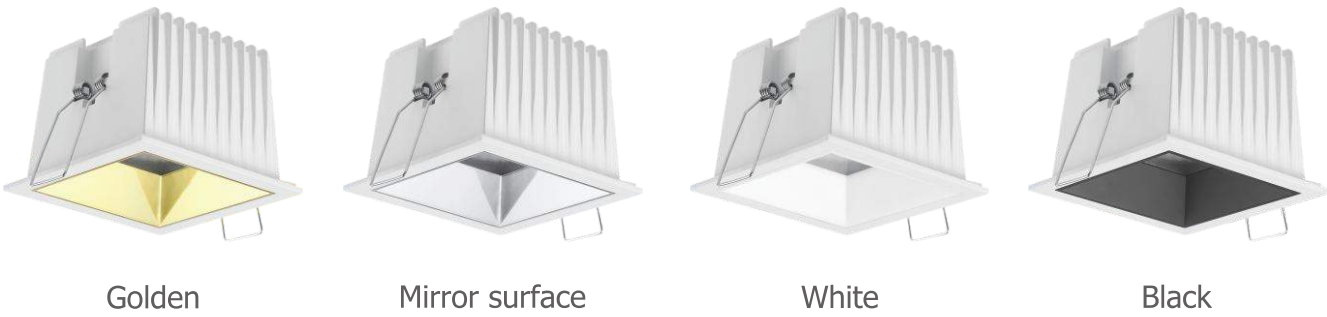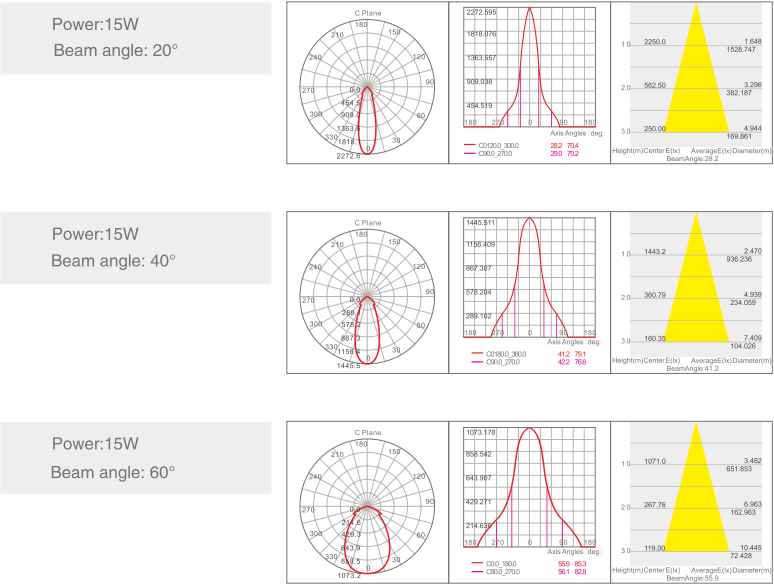

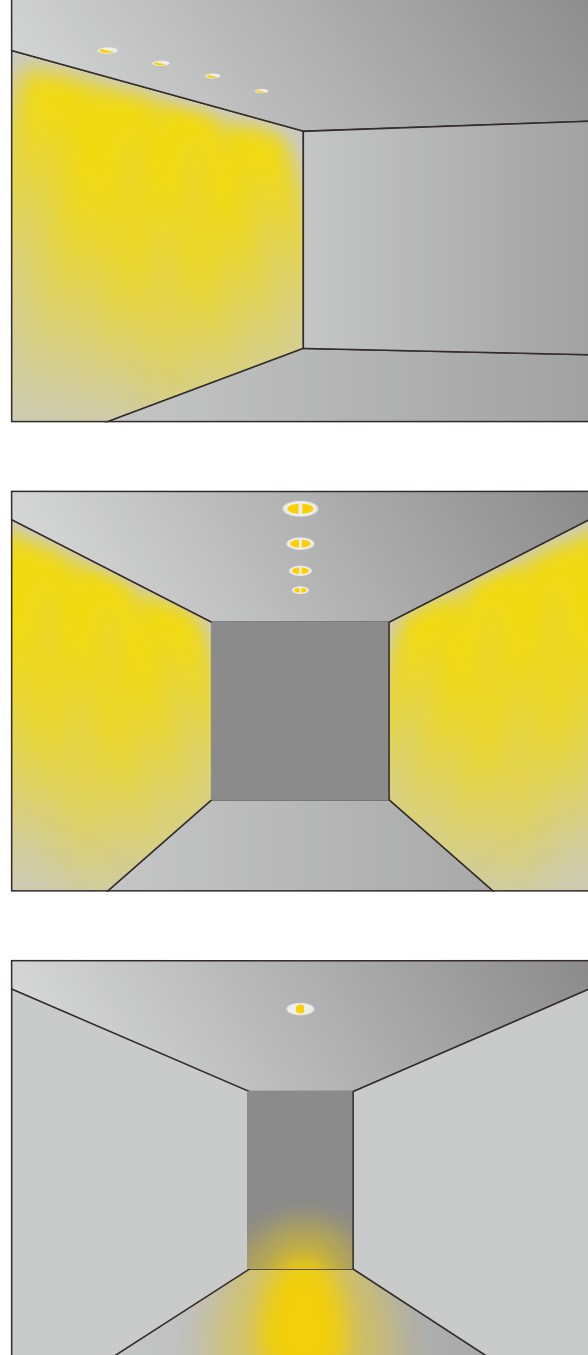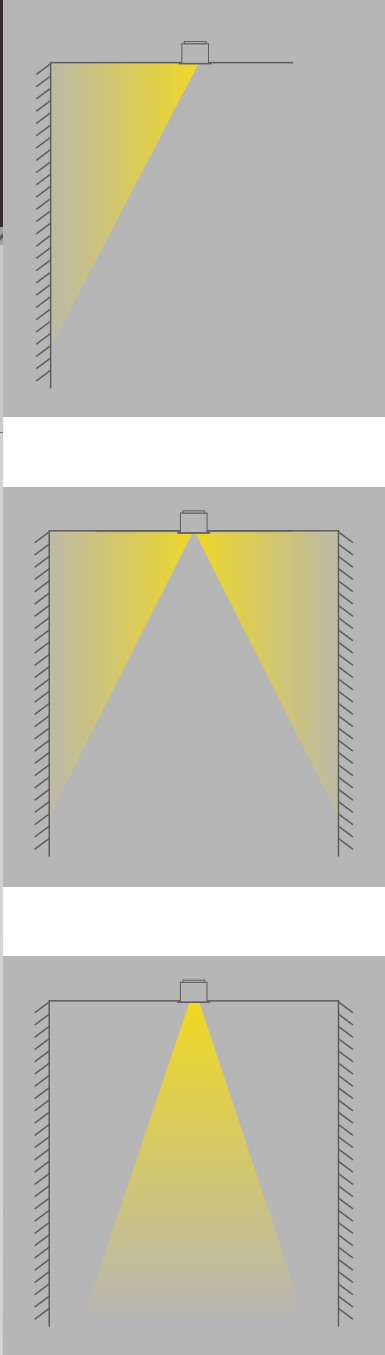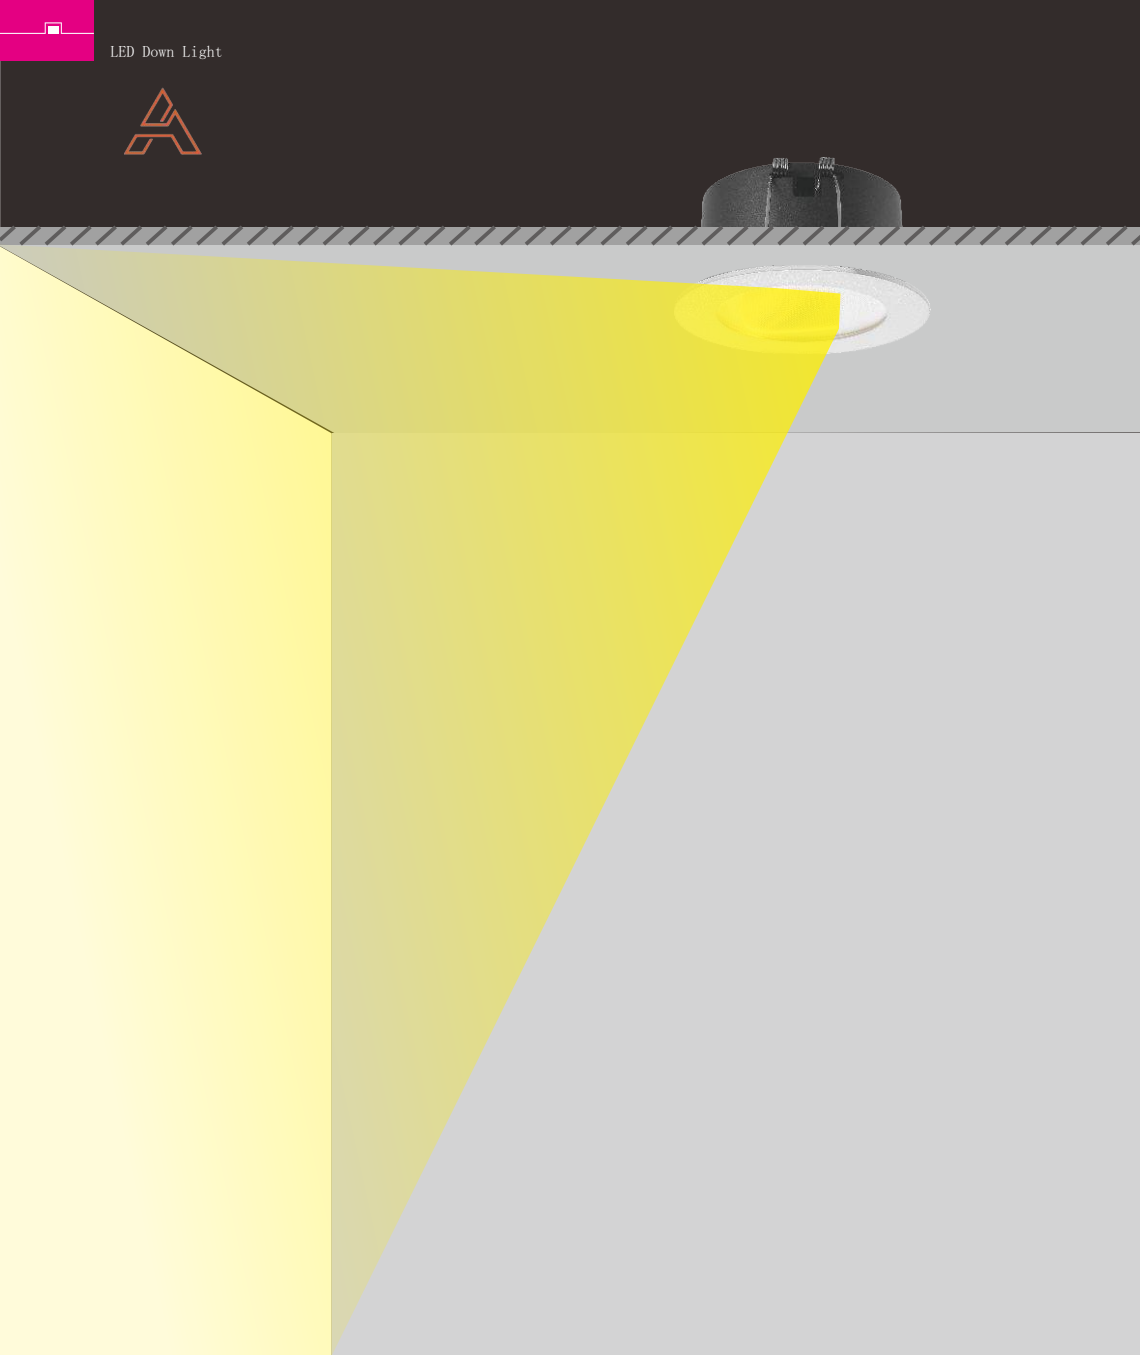


A
Unilateral polarized
wall wash

B
rectangle light


C
bilateral polarized
wall wash

LED Down Light



20W
50°
Single
Asymmetric

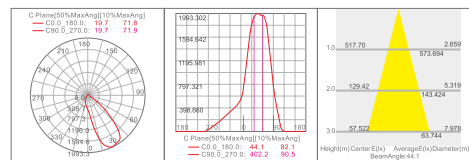


20W
80°
Double
Asymmetric

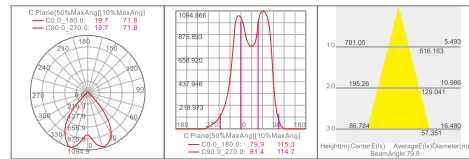

12W
65°
Rectangle

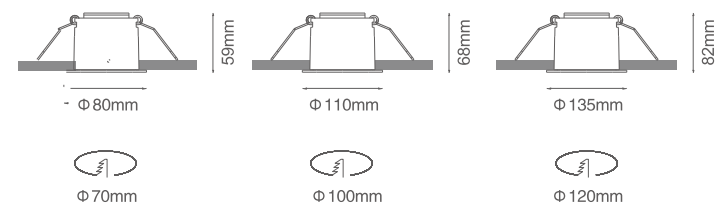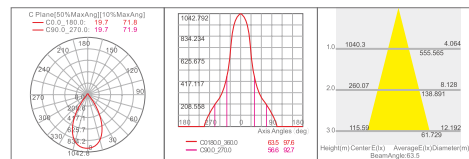

CCT: 3000K-4000K-5000K-6000K



Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z030701-12A	Φ80×59	Φ70	12W	960lm
Z030702-20A	Φ110×70	Φ100	20W	1600lm
Z030703-30A	Φ135×83.5	Φ120	30W	2400lm
Z030701-12B	Φ80×59	Φ70	12W	960lm
Z030702-20B	Φ110×70	Φ100	20W	1600lm
Z030703-30B	Φ135×83.5	Φ120	30W	2400lm
Z030701-12C	Φ80×59	Φ70	12W	9600lm
Z030702-20C	Φ110×70	Φ100	20W	1600lm
Z030703-30C	Φ135×83.5	Φ120	30W	2400lm

Surface treatment of color: ☐ WHITE/BLACK



LED IP44 Down Light

A direct replacement for halogen spotlights. For accent lighting in reception areas, hotels, restaurants as well as damp rooms and protected outside areas



CCT: 3000K-4000K-5000K-6000K



COB

CRI >80


CRI >90

15°

24°

36°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z030801-9	Φ100×H76	Φ80	9W	720lm
Z030802-15	Φ140×H96	Φ115	15W	1150lm
Z030803-20	Φ165×H112	Φ135	20W	1640lm
Z030804-30	Φ190×H132	Φ160	30W	2550lm

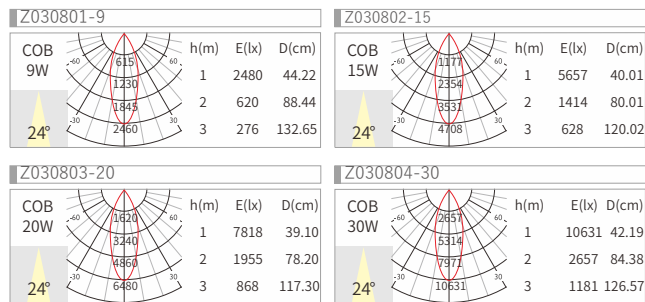



LED IP54 Down Light


Application: Labrary, club, museum
Swimming pool, fitness center, etc
Remarks:
Dia.3F& 4F & 5F are same clips as next page
6F & 8F are same clips as photo.

Surface treatment
of color:

- White+Black
- White
- Black




CCT: 3000K-4000K-5000K-6000K



- SMD
- CRI >80
- CRI >90
- 110°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z030901-10	Φ110×H65	Φ95	10W	800lm
Z030902-15	Φ135×H72	Φ110	15W	1200lm
Z030903-25	Φ160×H75	Φ130	25W	2000lm
Z030904-40	Φ185×H107	Φ170	40W	3200lm
Z030905-55	Φ235×H127	Φ200	55W	4800lm

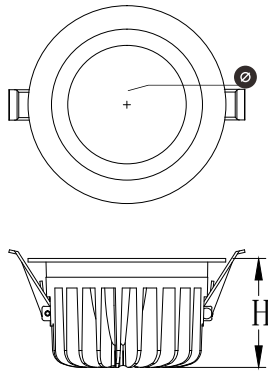

LED IP54 Down Light


Application: Labrary, club, museum
Swimming pool, fitness center, etc
Remarks:
Dia.3F& 4F & 5F are same clips as photo,
6F & 8F are same clips same as last page.

Surface treatment
of color:

- White+Black
- White
- Black




CCT: 3000K-4000K-5000K-6000K



- COB
- CRI >80
- CRI >90
- 50°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z031001-10	Φ110×H65	Φ95	10W	800lm
Z031002-15	Φ135×H72	Φ110	15W	1200lm
Z031003-25	Φ160×H75	Φ130	25W	2000lm
Z031004-40	Φ185×H107	Φ170	40W	3200lm
Z031005-55	Φ235×H127	Φ200	55W	4400lm

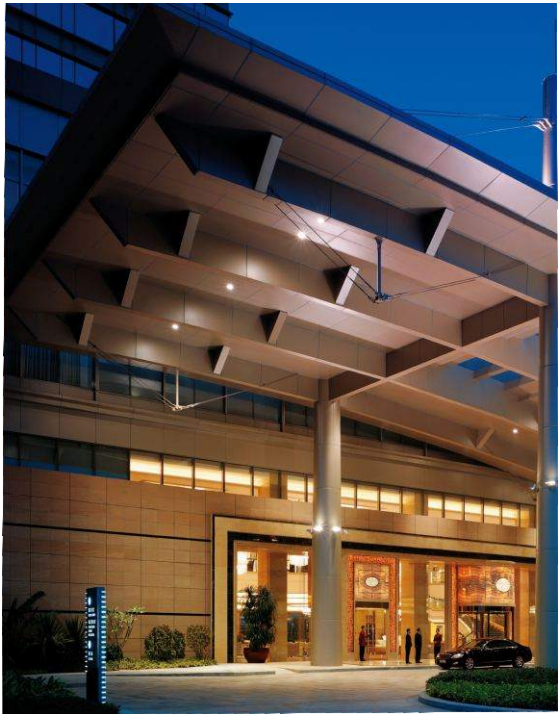



LED IP65 Down Light



IP65
waterproof grade more suitable for some places
that need waterproof,such as bathroom,spa,etc .



CCT: 3000K-4000K-5000K-6000K

COB

CRI
>80

CRI
>90

45°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z031101-10	Φ100×H75	Φ90	10W	800lm
Z031102-15	Φ140×H90	Φ130	20W	1200lm
Z031103-25	Φ185×H112	Φ170	30W	2000lm
Z031104-40	Φ230×H128	Φ200	40W	3200lm



LED IP65 Down Light

IP 65 waterproof for bathroom
Fire-rated approval standard BS476
Varous pure alu. slimline twist & lock bezels(sold separately)



CCT: 3000K-4000K-5000K-6000K

COB


CRI >80

CRI >90

40°

60°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z031201-10	φ 83X95mm	φ 65mm	10W	800LM



LED Down Light

CCT: 3000K-4000K-5000K-6000K

COB

CRI >80

CRI >90


15°

24°

38°

60°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z031301-5	Φ68×42	Φ55	5W	400lm
Z031302-7	Φ88×60	Φ75	7W	560lm
Z031303-12	Φ110×70	Φ95	12W	1000lm
Z031304-20	Φ138×74	Φ115	20W	1900lm

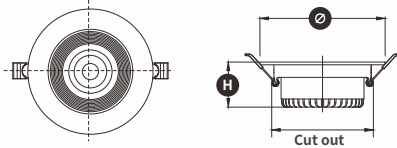

Z031303-12					Z031304-20				
COB	h(m)	E(lx)	D(cm)		COB	h(m)	E(lx)	D(cm)	
12W	1	2825	50.88		20W	1	7818	39.10	
	2	706	101.75			2	1955	78.20	
	3	314	152.63			3	868	117.30	



LED Down Light

Very homogenous light
Functional design
Easy installation with fast connection

- White+Black
- White
- Black



CCT: 3000K-4000K-5000K-6000K



SMD

110°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z031401-3	Φ75×H35	Φ55	3W	240lm
Z031402-6	Φ98×H35	Φ75	6W	480lm
Z031403-10	Φ118×H35	Φ95	10W	800lm
Z031404-15	Φ140×H36	Φ115	15W	1200lm
Z031405-20	Φ180×H37	Φ145	20W	1600lm
Z031406-30	Φ220×H36	Φ190	30W	2400lm





LED Down Light

Very homogenous light
Functional design
Easy installation with fast connection

White+Black White Black




CCT: 3000K-4000K-5000K-6000K





SMD 110°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z031501-6	Φ98×H45	Φ75	6W	480lm
Z031502-10	Φ118×H47	Φ95	10W	800lm
Z031503-15	Φ140×H52	Φ115	15W	1200lm
Z031504-20	Φ180×H54	Φ145	20W	1600lm

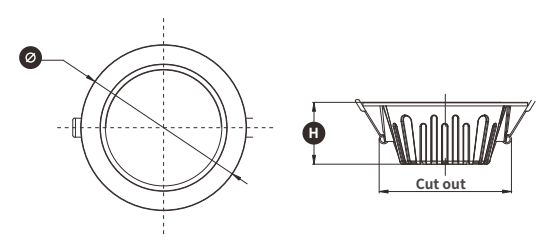



Aluminum Bezel for recessed downlights

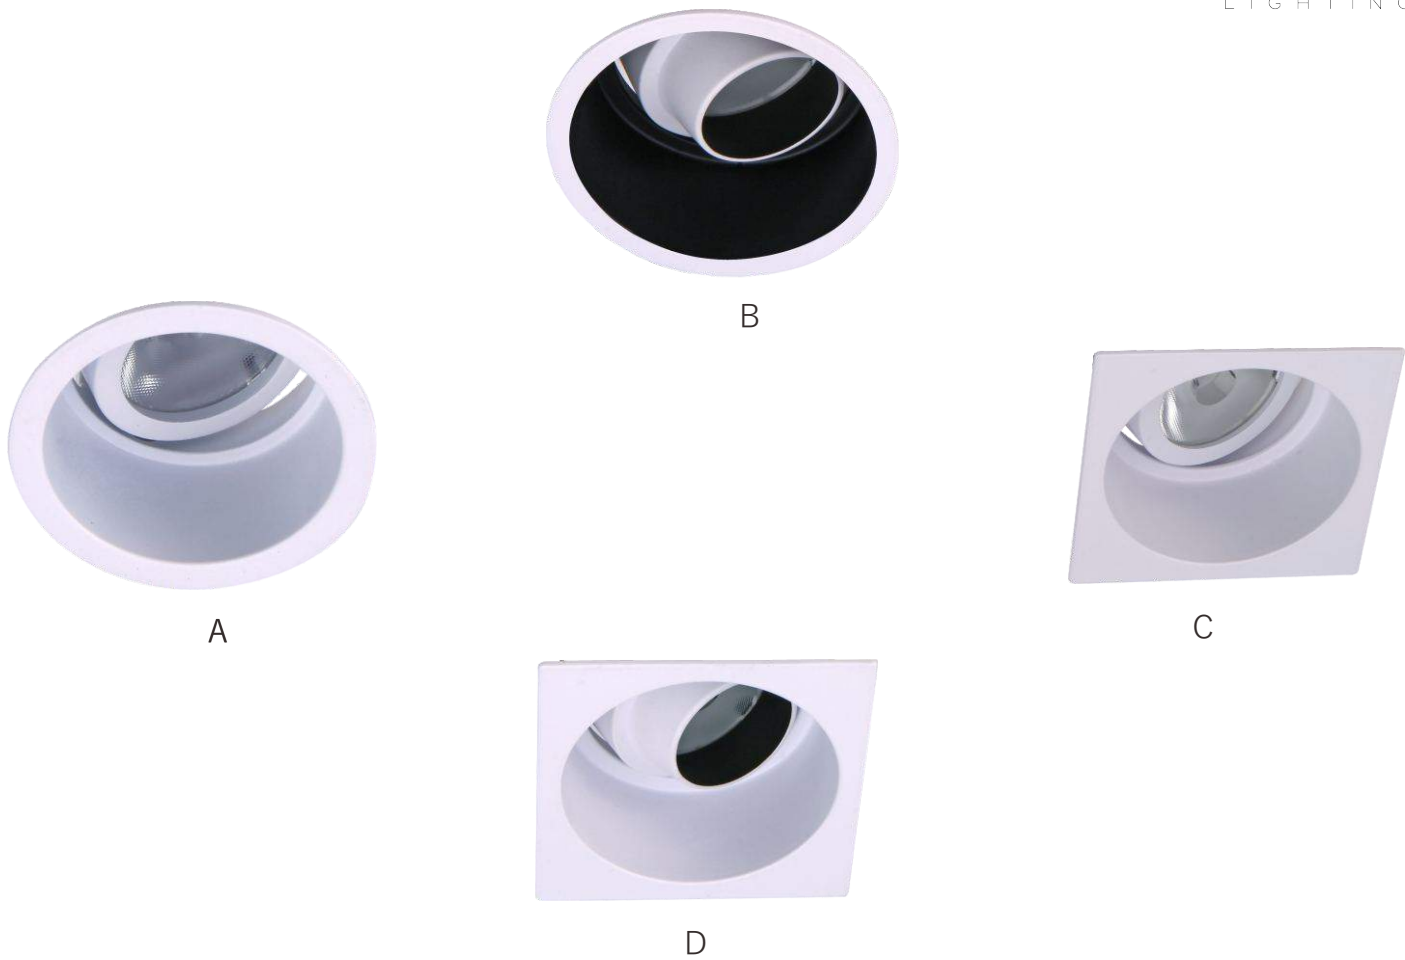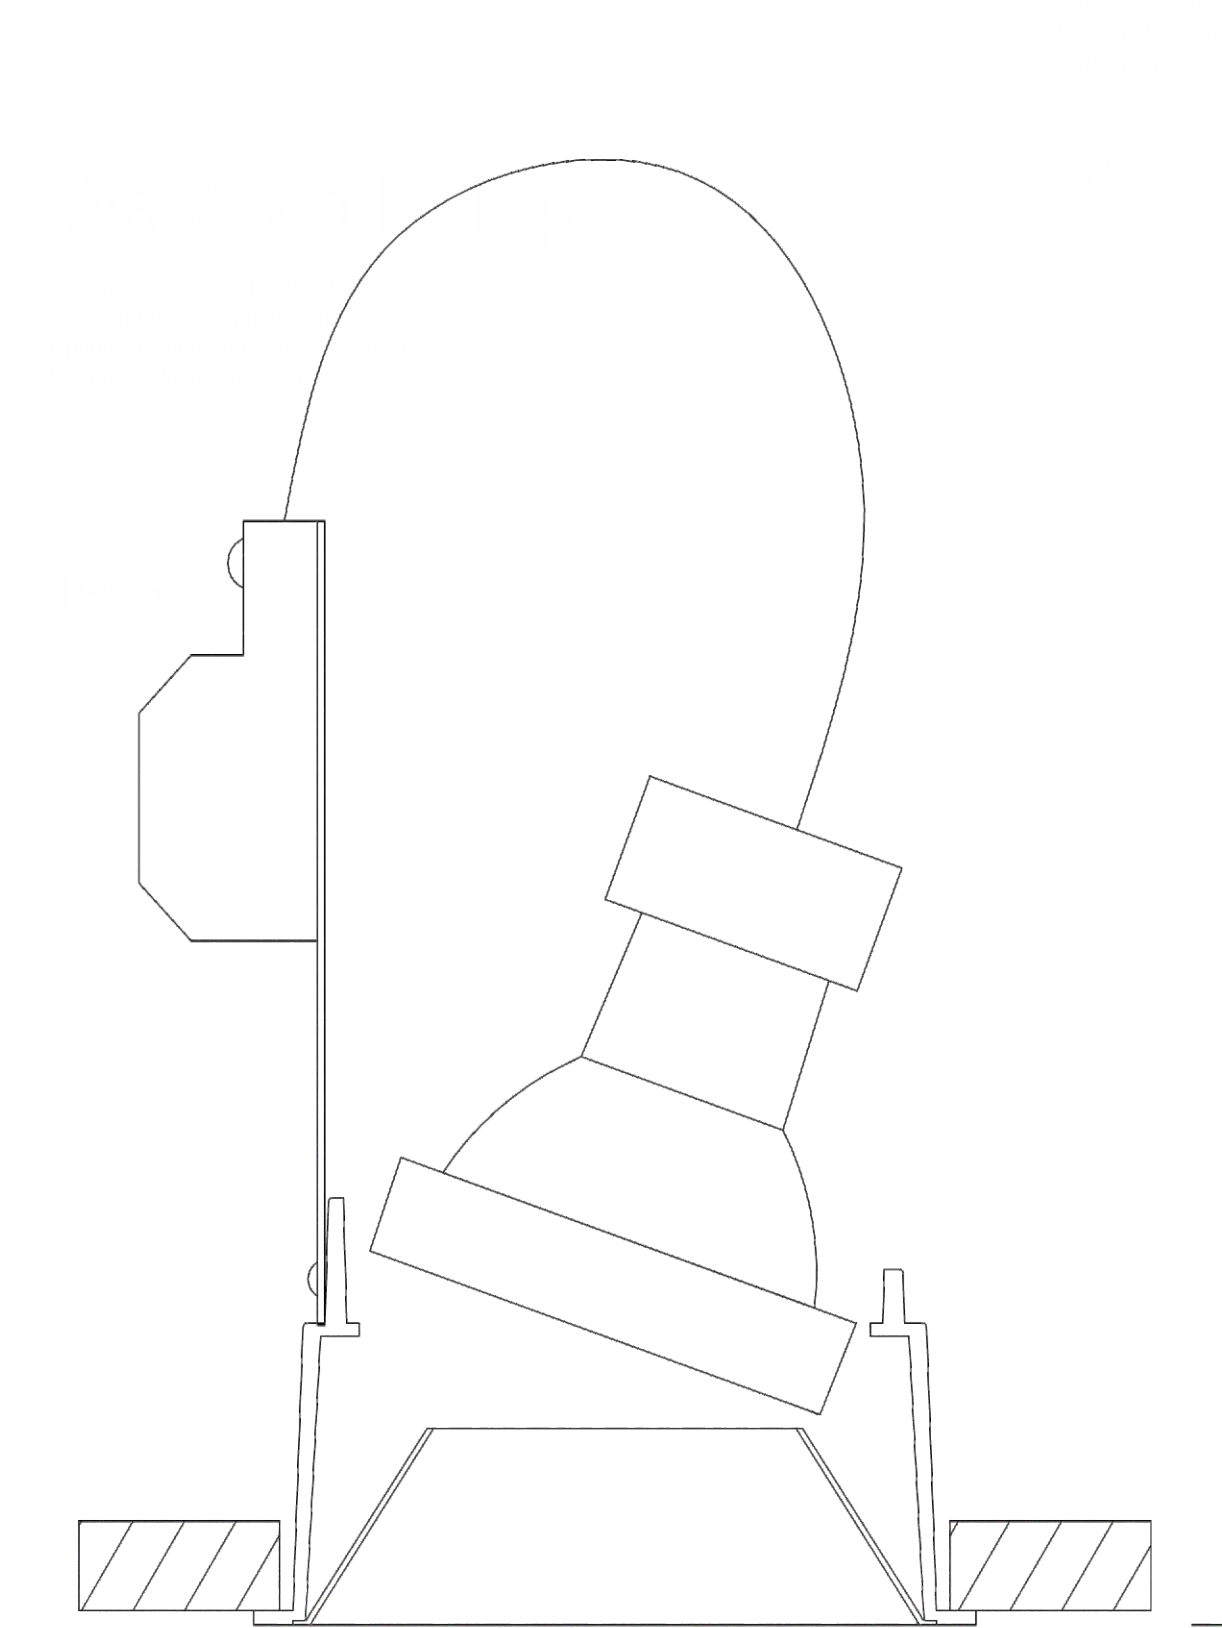

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z031601A	Φ81×55	Φ75	8W	640lm
Z031601B	81×81×55	Φ75	12W	960lm
Z031602A	Φ81×55	Φ75	8W	640lm
Z031602B	81×81×55	Φ75	12W	960lm




Aluminum Bezel for recessed downlights



Item No	Dimension(mm)	Cut out(mm)
Z031603A	Φ85	Φ75
Z031603B	85*85	Φ75
Z031603C	Φ85	Φ75
Z031603D	85*85	Φ75



Aluminum Bezel
Surface mounted, recessed mounted, track mounted, and suspending

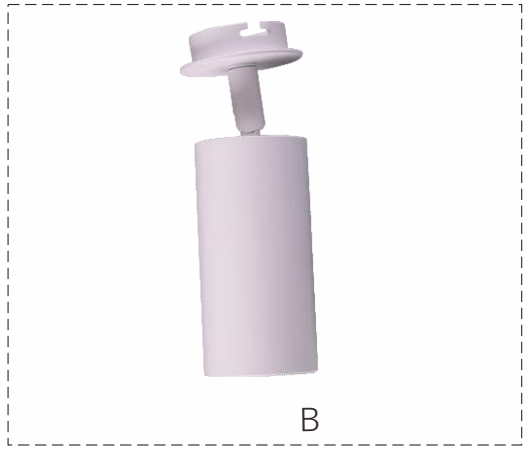

Item No	Dimension(mm)
Z031604A	Φ60
Z031604B	Φ60
Z031604C	Φ60
Z031604D	Φ60





A



B



C



D

Aluminum Bezel



The small round hole lighting model has IP65 waterproof grade optional, more suitable for some places that need waterproof, such as bathroom, spa, etc.


Item No	Dimension(mm)	Cut out(mm)
Z031605A	Φ98	Φ80
Z031605B	Φ98	Φ80
Z031605C	Φ98	Φ80
Z031605D	Φ98	Φ80





LED Surface Mounted Downlight Series

Applications: store, supermarket, hotel, exhibition hall Etc.

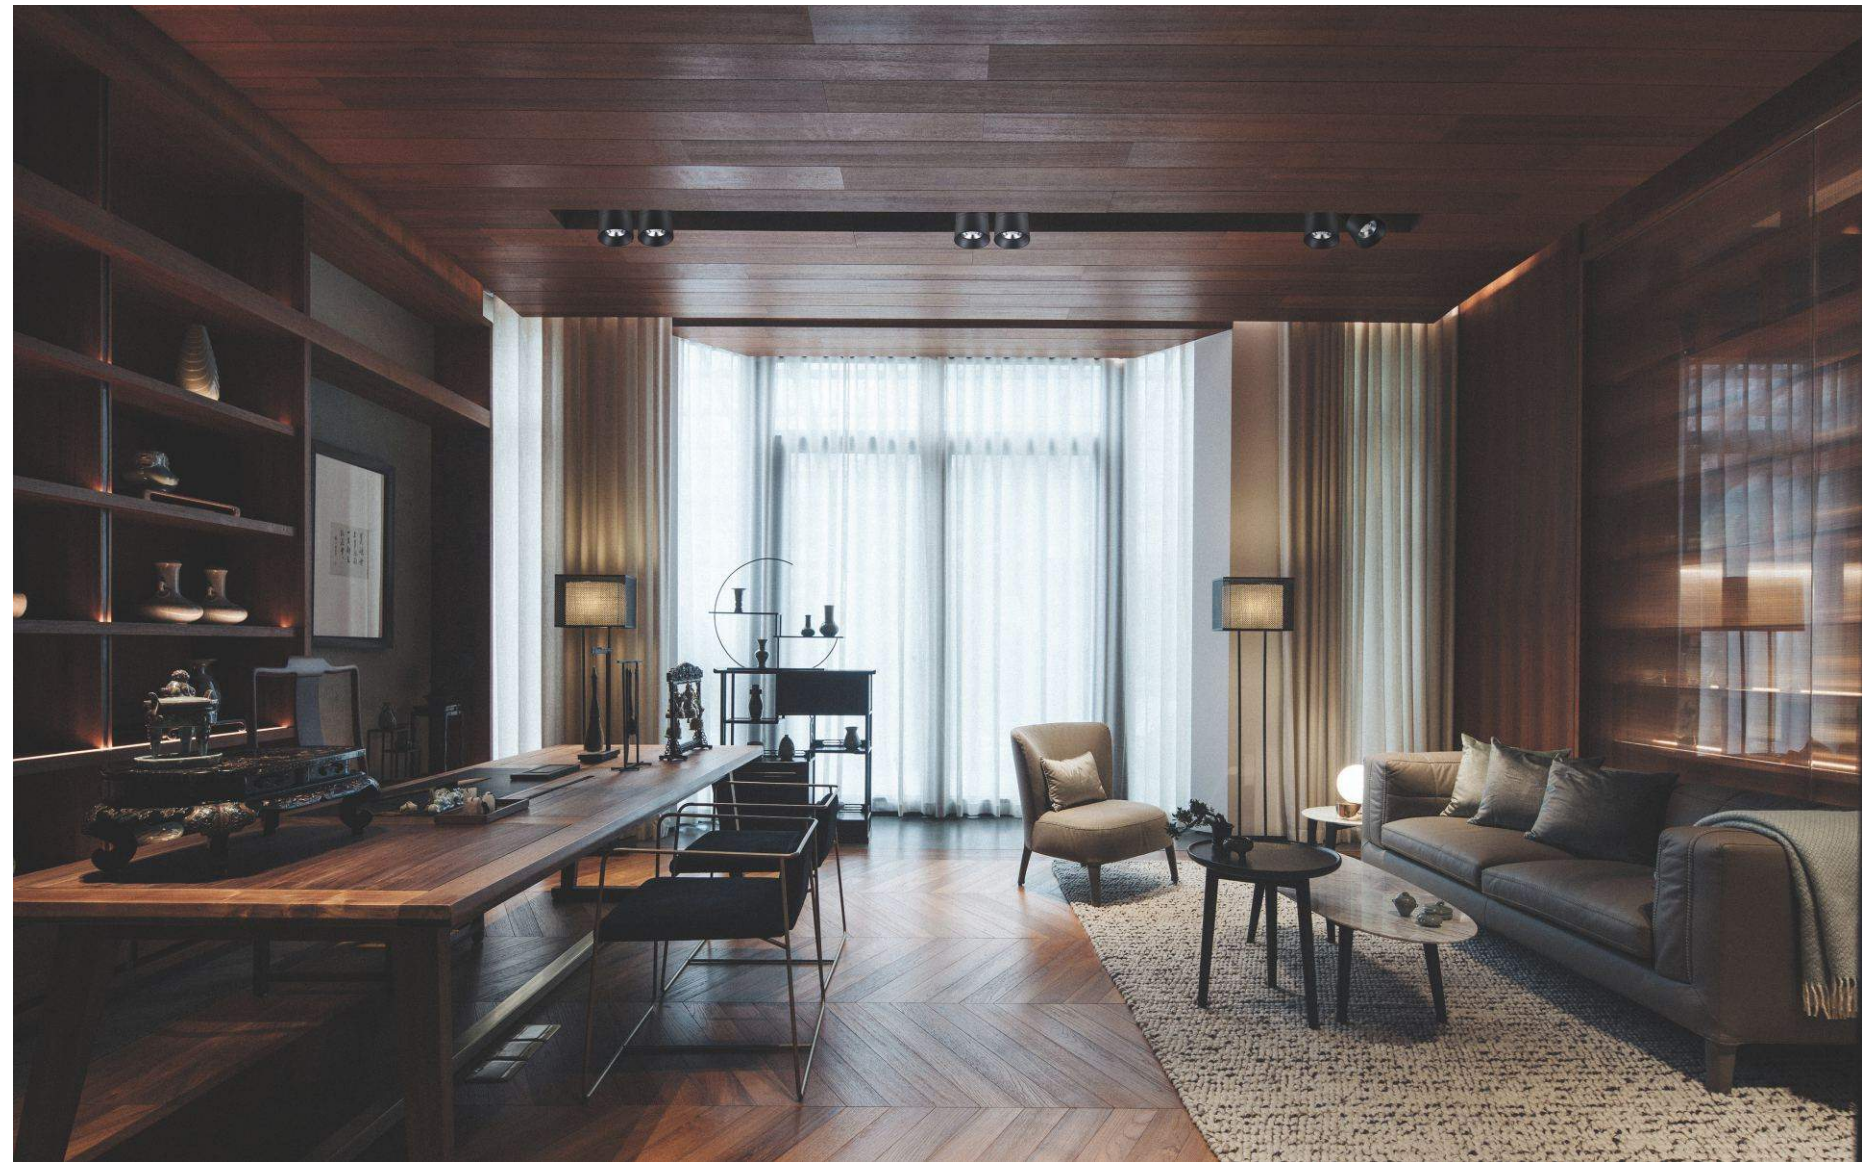





Direct illumination adjustable design


The vertical and vertical adjustable angles are designed to meet different lighting applications in different locations.

Diversity installation

- 1:Directly installed in ceiling.
- 2:To avoid smallpox decoration, building joists or fire fighting systems, install them through hangers.

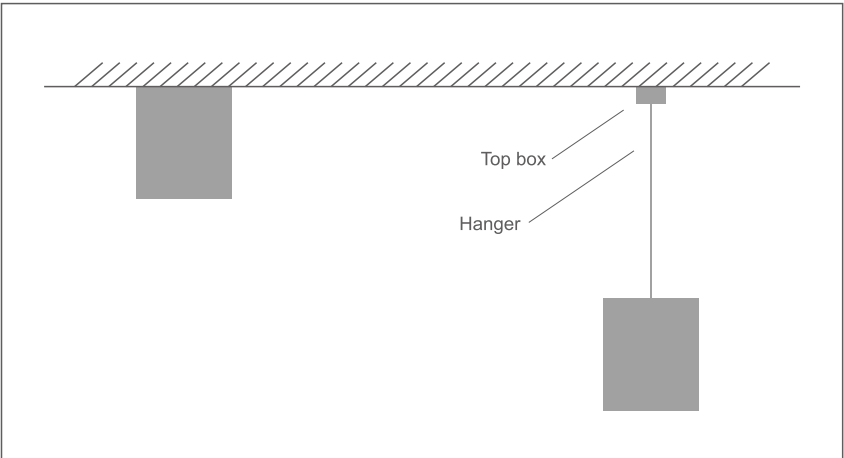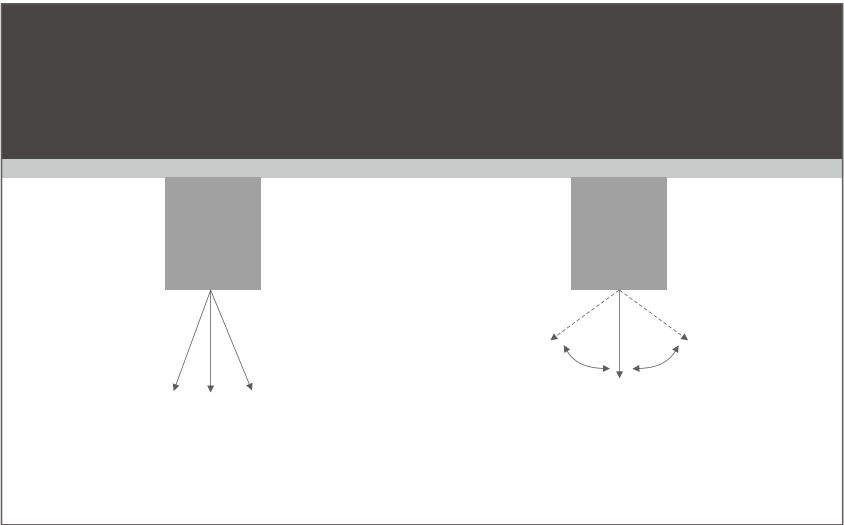

CCT: 3000K-4000K-5000K-6000K




COB

CRI >80

CRI >90

45°

Item No	Dimension(mm)	Power	Luminous
Z031901-15	Φ83×108	15W	1200lm
Z031902-20	Φ115×117	20W	1600lm
Z031903-30	Φ150×139	30W	2400lm
Z031904-40	Φ190×156	40W	3200lm

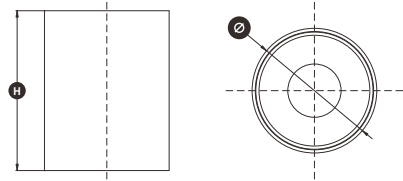

Z031801-15					Z031802-20				
COB	h(m)	E(lx)	D(cm)		COB	h(m)	E(lx)	D(cm)	
15W	1	5657	40.01		20W	1	7818	39.10	
	2	1414	80.01			2	1955	78.20	
	3	628	120.02			3	868	117.30	
24°					24°				
Z031803-30					Z031804-40				
COB	h(m)	E(lx)	D(cm)		COB	h(m)	E(lx)	D(cm)	
30W	1	10631	42.19		40W	1	13391	37.43	
	2	2657	84.38			2	3347	74.86	
	3	1181	126.57			3	1488	112.29	
24°					24°				



LED Down Light



Surface treatment
of color:

- White
- Black



CCT: 3000K-4000K-5000K-6000K



COB

CRI >80


CRI >90

15°

24°

36°

Item No	Dimension(mm)	Power	Luminous
Z032001-10	74×74×150	10W	800lm
Z032002-20	97×97×150	20W	1600lm
Z032003-30	114×114×150	30W	2400lm

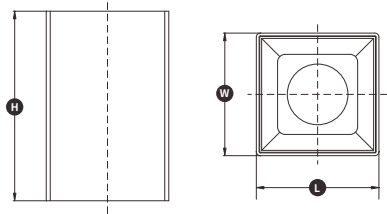

Z031901-10

COB	h(m)	E(lx)	D(cm)
10W 24°	1	2480	44.22
	2	620	88.44
	3	276	132.65

Z031902-20

COB	h(m)	E(lx)	D(cm)
20W 24°	1	7818	39.10
	2	1955	78.20
	3	868	117.30

Z031903-30

COB	h(m)	E(lx)	D(cm)
30W 24°	1	10631	42.19
	2	2657	84.38
	3	1181	126.57





Down Light

Efficiency, High Quality, Great Value,
Sleek and Clean Design.

- Heat faster
- Adjustable angle
- Long life

White

Black

CCT: 3000K-4000K-5000K-6000K

COB

CRI >80

CRI >90

15°

24°

36°

Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z032101-12A	Φ73×H118mm	Φ65	12W	960LM
Z032102-25A	Φ93×H118mm	Φ85	25W	2000LM

350°
Rotary folding spotlight

0~90°
Folding

- High Brightness
- Uniform Luminescence
- High Colour
- Pure Colour

White

Black

CCT: 3000K-4000K-5000K-6000K

COB

CRI >80



CRI >90

15°

24°

36°

Item No	Dimension(mm)	Power	Luminous
Z032101-12B	Φ60*H160mm	12W	960LM
Z032102-25B	Φ80×H198mm	25W	2000LM

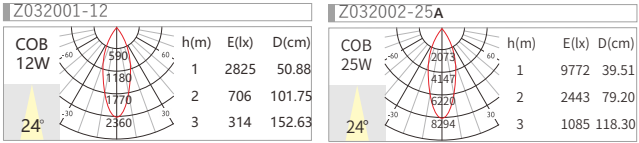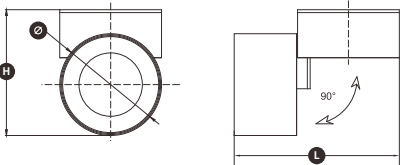



LED Linear Spot Light Series

Applications: Store, supermarket, hotel, office, museum, home, etc.





High-quality aluminum housing,
good heat dissipation,
light decay less,
long life-span

long life-span

Wide voltage constant current circuit ,
No flash ,
Stable /reliable performance







LED Linear Light

Recessed Downlight For Museum Fashion Store
Office Lighting Ceiling Spot Light

CCT: 3000K-4000K-5000K-6000K

Item No	Dimension(mm)	Cut out(mm)	Power
Z032201-4	54×54×50	49×49	4W
Z032202-12	130×54×52	125×49	12W
Z032203-20	206×54×52	201×49	20W
Z032204-40	396×54×52	390×49	40W



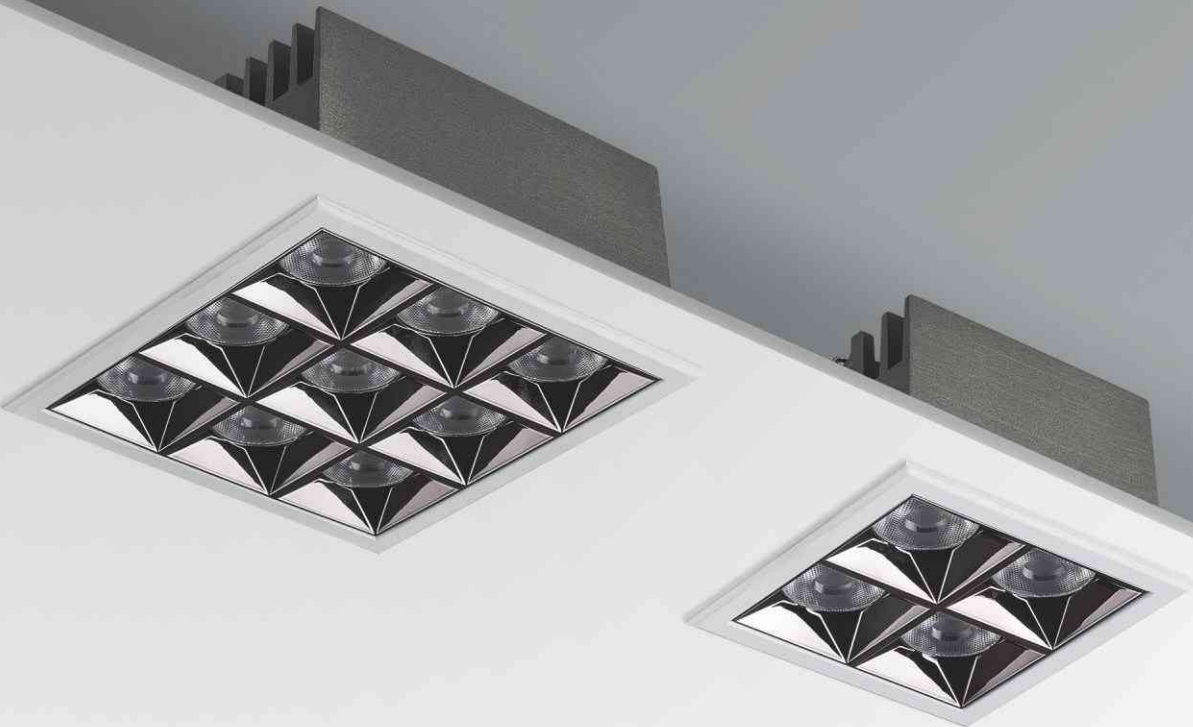



LED Linear Light

Recessed Downlight For Museum Fashion Store
Office Lighting Ceiling Spot Light

CCT: 3000K-4000K-5000K-6000K



Item No	Dimension(mm)	Cut out(mm)	Power
Z032205-15	92×92×52	87×87	15W
Z032206-36	130×130×52	125×125	36W

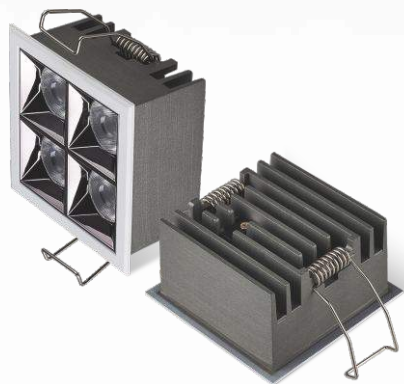

Product Feature

Scientific leak light system,new design panel for easy install,
principles of Optics to make higher light effective as possible





LED Linear Light

Recessed Downlight For Museum Fashion Store
Office Lighting Ceiling Spot Light

CCT: 3000K-4000K-5000K-6000K

Item No	Dimension(mm)	Power	Luminous
Z032207-15	81.7×81.7×80	15W	1275lm
Z032208-40	119.6×119.67×90	40W	3385lm





LED Panel Light Series

—
Applications: Convention center,
business center, office, home,
shopping mall, etc






LED Panel Light

Back Emitting

CCT: 3000K-4000K-5000K-6000K



Item No	Dimension(mm)	Power	Luminous
Z040101-40	295 × 1195	40W	3200lm
Z040102-40	595 × 595	40W	3200lm


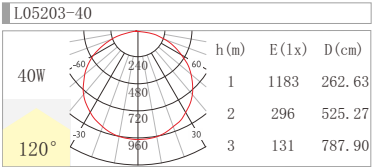





LED Linear Light Series

Applications:

Hotel, restaurant, residential and commercial spaces



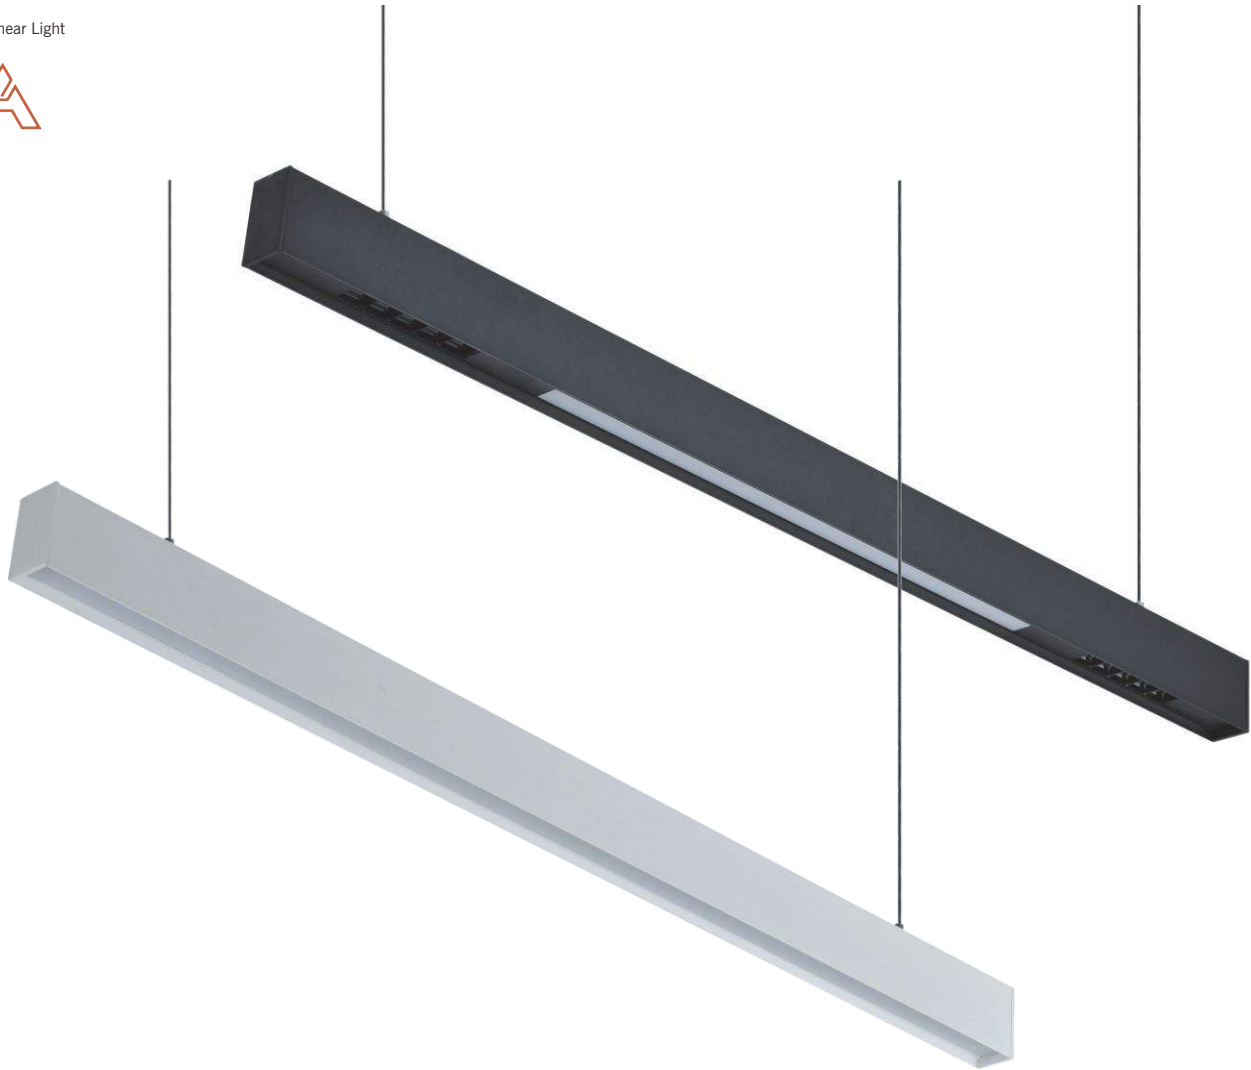

LED Linear Light

CCT: 3000K-4000K-5000K-6000K



SMD

CRI >80

CRI >90

110°

Item No	Dimension(mm)	Power	Luminous
Z050101-40	1200X43X75	40W	3200lm
Z050102-60	2000X43X75	60W	4800lm



LED Linear Light

CCT: 3000K-4000K-5000K-6000K



SMD

CRI >80

CRI >90

110°

Item No	Dimension(mm)	Power	Luminous
Z050201-40	1200X43X75	40W	3200lm
Z050202-60	2000X43X75	60W	4800lm





LED Step Light

IP 65 design
Use for indoor and outdoor,
corridor, room and stair



Z060103-3




Z060102-3



Z060101-3



CCT: 3000K-4000K-5000K-6000K



Item No	Dimension(mm)	Cut out(mm)	Power	Luminous
Z060101-3	66X70X40mm	62X62mm	1X3W	180lm
Z060101-3	70X70X75mm	60X60mm	1X3W	180lm
Z060101-3	Φ70X75mm	Φ60mm	1X3W	180lm



LED Waterproof Light

Application:Wet interior, dusty place and outdoor places,
such as factory, warehouse, pharmaceutical&food industry,
cold store, car parking, tunnel, bathroom, etc




IK08 IP65


Product Features

Reflector:steel plate
Housing:PC
High efficiency:100lm/w

CCT: 3000K-4000K-5000K-6000K



Item No	Dimension(mm)	Power	Luminous
Z070101-18	653X85X78X416mm	18W	1800lm
Z070102-36	1263X85X78X838mm	36W	3600lm
Z070103-58	1563X85X78X1130mm	58W	4800lm
Z070104-2×18	653X130X78X416mm	2X18W	2400lm
Z070105-2×36	1263X130X78X838mm	2X36W	4800lm
Z070106-2×58	1563X130X78X1130mm	2X58W	6000lm





CCT: 3000K-4000K-5000K-6000K



SMD

CRI >80

CRI >90

110°

Silver

Item No	Dimension(mm)	Power	Luminous
Z080101-4	300*20*33	4W	500lm
Z080102-8	575*20*33	8W	900lm
Z080103-13	880*20*33	13W	1400lm
Z080104-16	1185*20*33	16W	1800lm



CCT: 3000K-4000K-5000K-6000K



SMD

CRI >80

CRI >90

110°

Item No	Power	LED Type	LED QTY.	Specification
Z090101-24	4.8W/M	SMD 3528	60pcs/m	5m/Roll
Z090102-48	9.6W/M	SMD 3528	120pcs/m	5m/Roll



CCT: 3000K-4000K-5000K-6000K



SMD

CRI >80

CRI >90

110°

Item No	Power	LED Type	LED QTY.	Specification
Z090103-36	7.2W/M	SMD 5050	30pcs/m	5m/Roll
Z090104-72	14.4W/M	SMD 5050	60pcs/m	5m/Roll